

Computer Networks

Instructor: Niklas Carlsson


Email: niklas.carlsson@liu.se

Notes derived from "*Computer Networking: A Top Down Approach*", by Jim Kurose and Keith Ross, Addison-Wesley.

The slides are adapted and modified based on slides from the book's companion Web site, as well as modified slides by Anirban Mahanti and Carey Williamson.

Network Layer


- ❑ carries segments from sending to receiving host
- ❑ on sending side, encapsulates segments into IP datagrams
- ❑ on rcv side, delivers segments to TL
- ❑ network layer protocol runs in *every* node (hosts and routers)
- ❑ router examines header fields in all IP datagrams passing through it

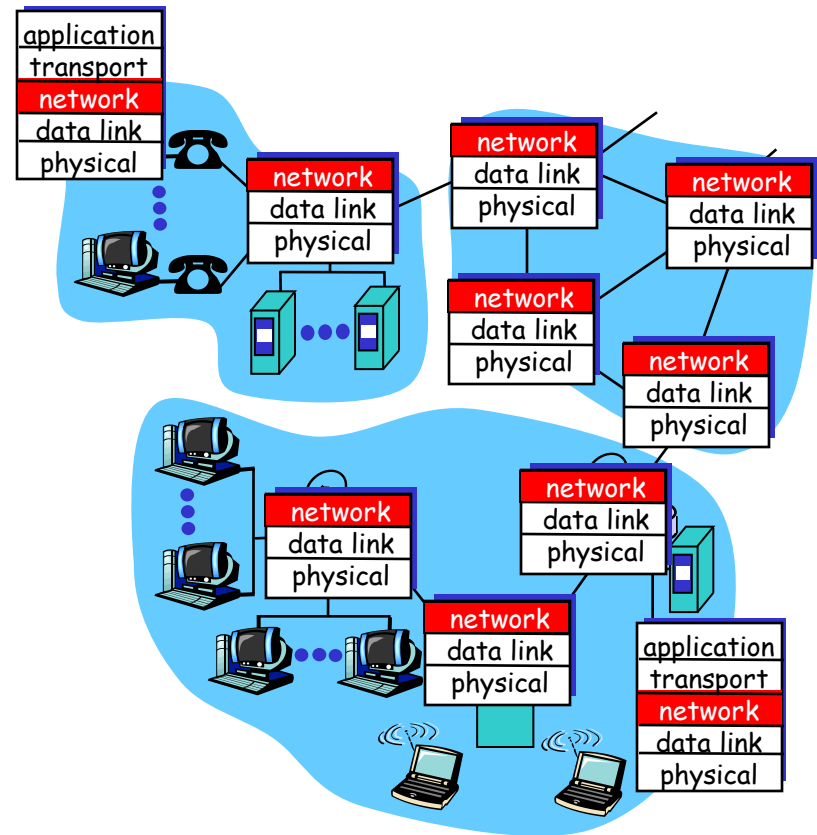

Key Network-Layer Functions


- ❑ *forwarding*: move packets from router's input to appropriate router output
- ❑ *routing*: determine the path taken by packets as they flow from a sender to a receiver
 - *Routing algorithms* - run at routers to determine "paths";
 - Routers have a forwarding table
 - Destination address-based in Datagram networks
 - Virtual circuit number-based in VC Networks

Interplay between routing and forwarding

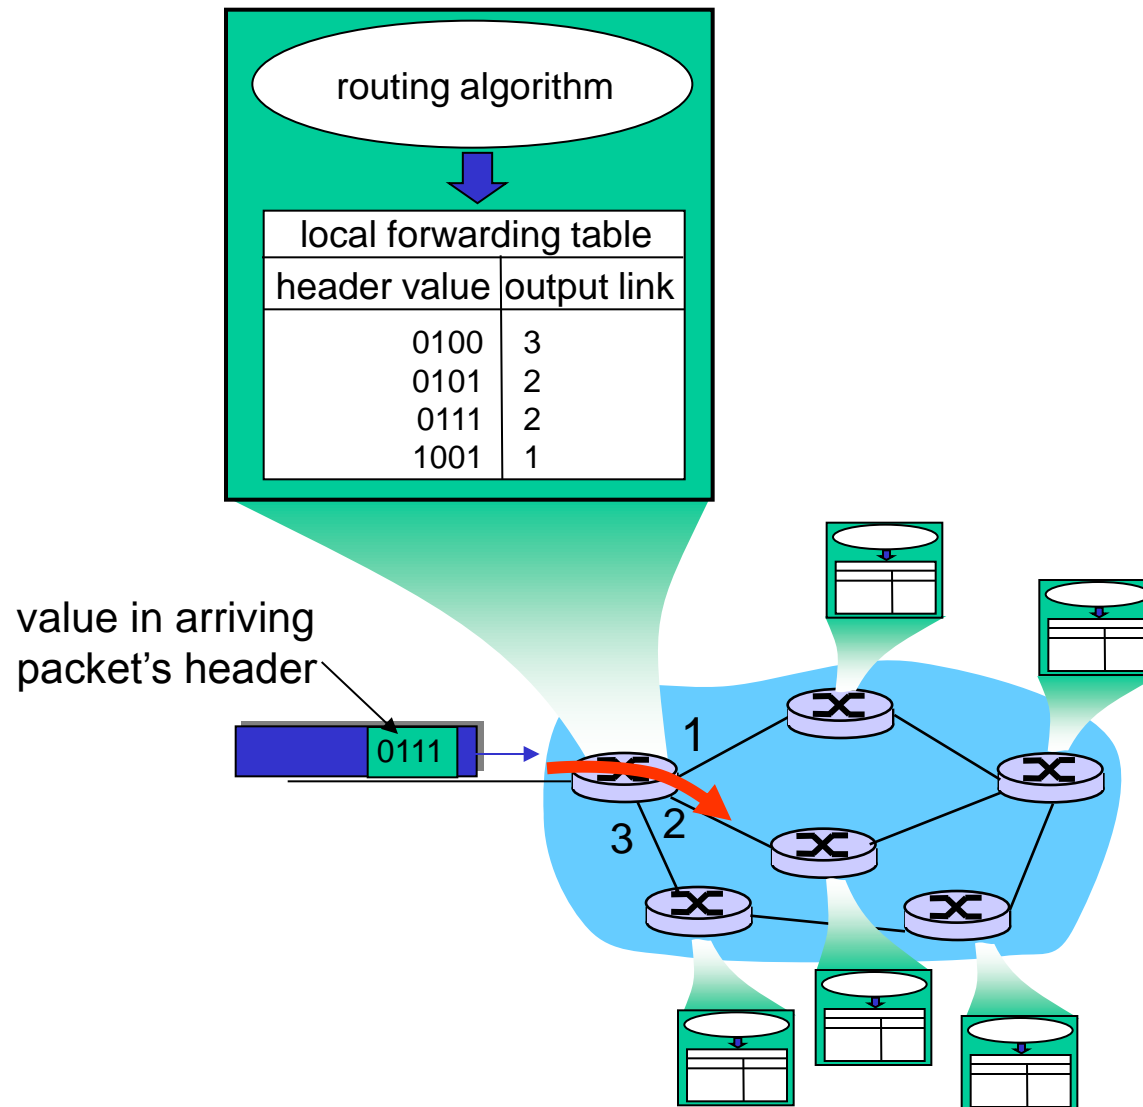


What does the Network layer consist of?

Host, router network layer functions:

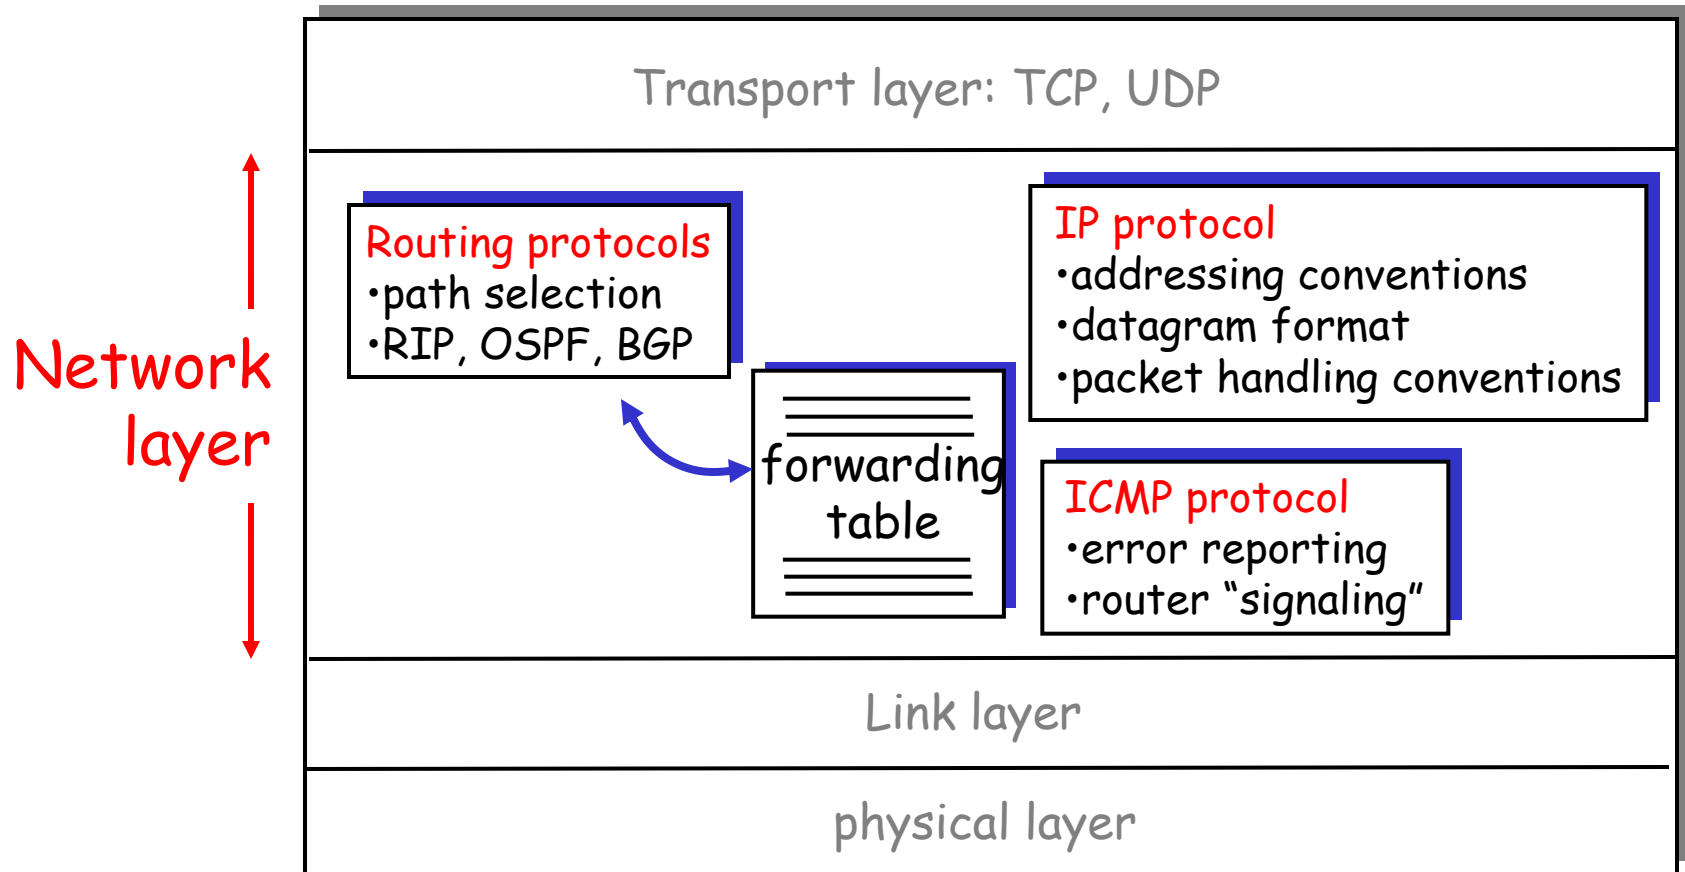

The Internet Protocol (IP)

IP datagram format (IPv4)

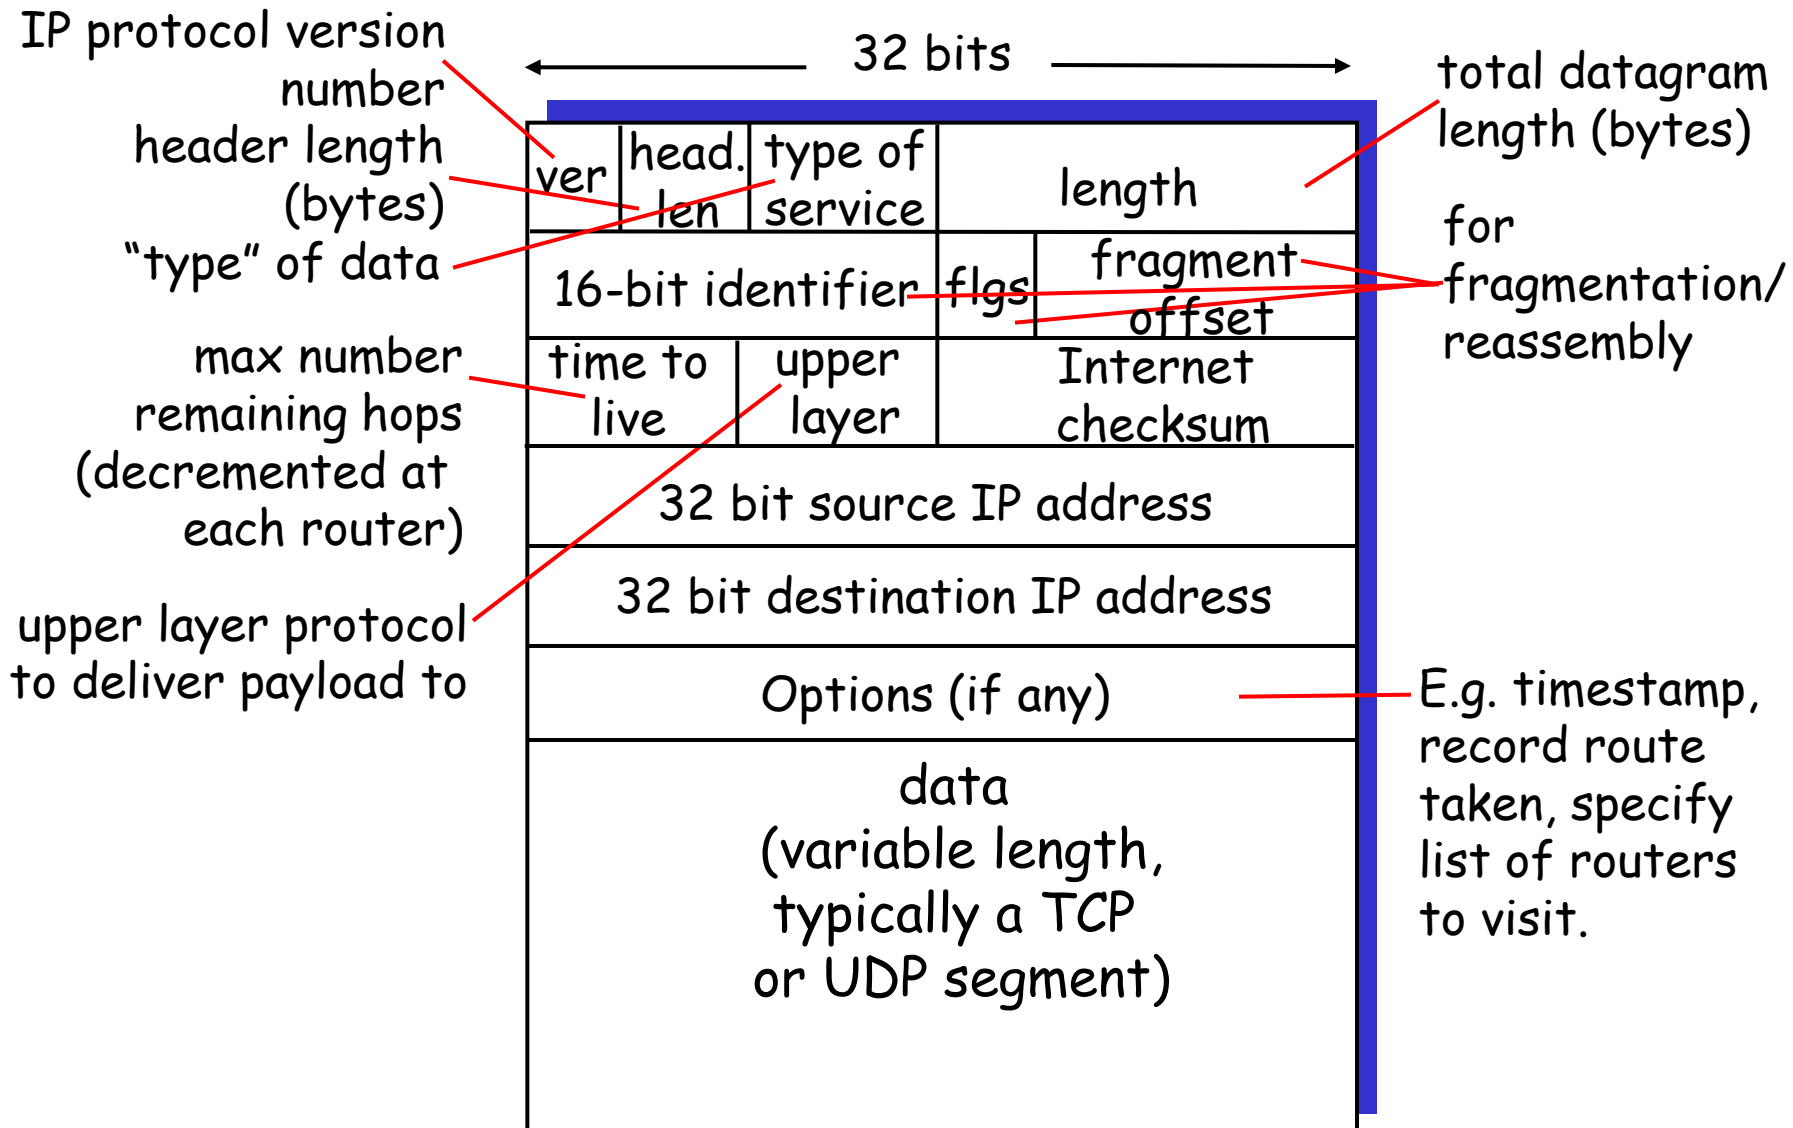


IP datagram format (IPv4)

IP protocol version
number
header length
(bytes)
"type" of data

max number
remaining hops
(decremented at
each router)

upper layer protocol
to deliver payload to

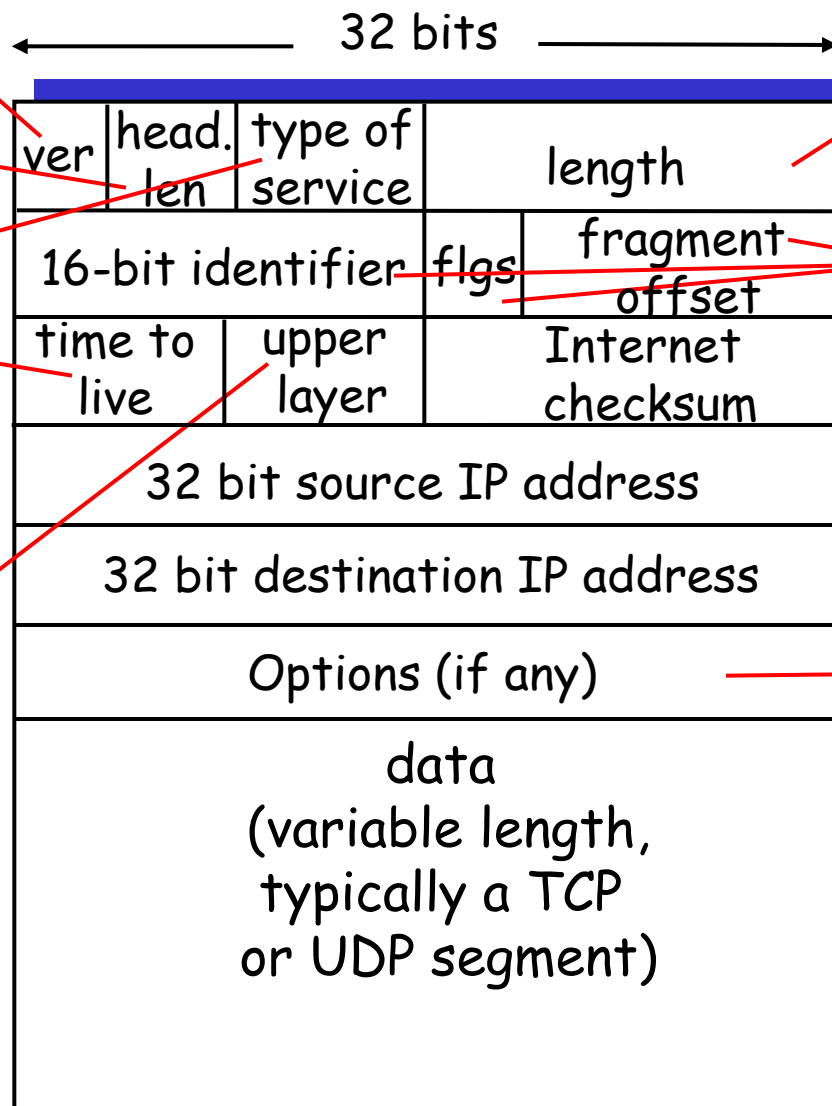

total datagram
length (bytes)
for
fragmentation/
reassembly

E.g. timestamp,
record route
taken, specify
list of routers
to visit.

how much overhead
with TCP?


- ❑ ?? bytes of TCP
- ❑ ?? bytes of IP

IP datagram format (IPv4)

IP protocol version
number
header length
(bytes)
"type" of data

max number
remaining hops
(decremented at
each router)

upper layer protocol
to deliver payload to

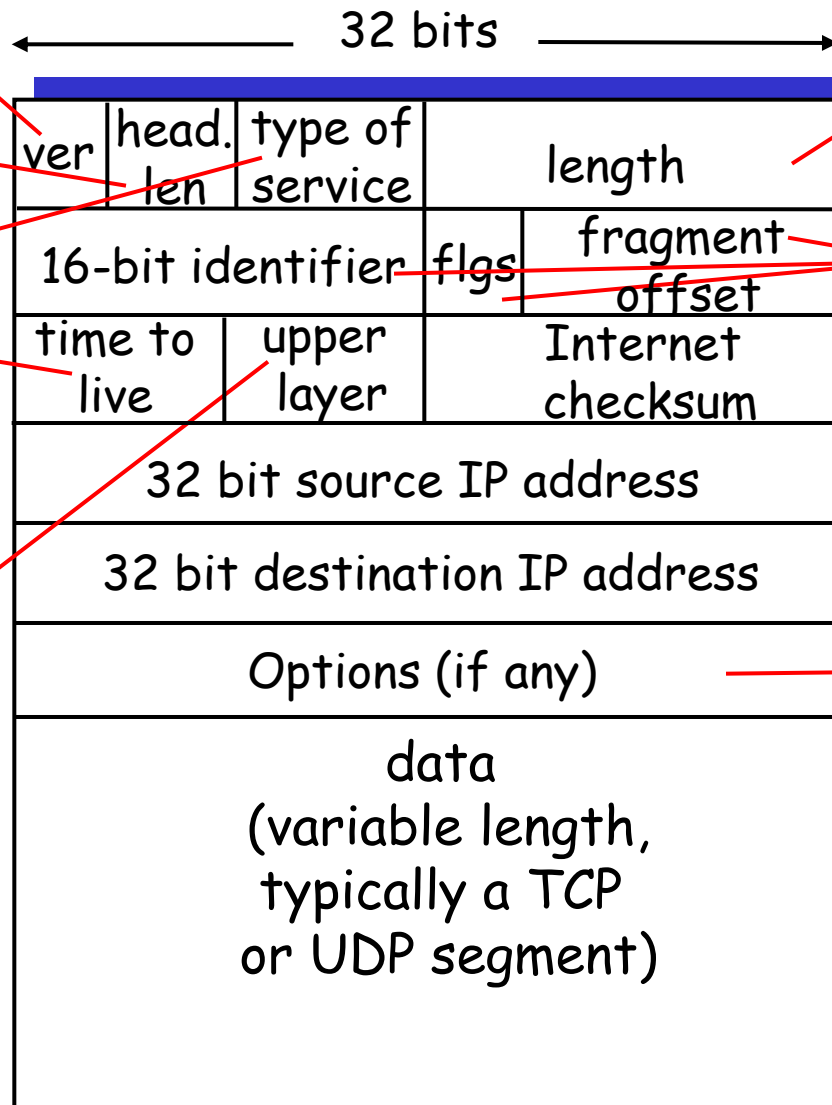

total datagram
length (bytes)
for
fragmentation/
reassembly


E.g. timestamp,
record route
taken, specify
list of routers
to visit.

how much overhead with TCP?

- ❑ 20 bytes of TCP
- ❑ 20 bytes of IP
- ❑ = 40 bytes + app
layer overhead

IP Fragmentation & Reassembly

- ❑ network links have a limit on the largest possible link-level frame size permitted.
 - MTU: Maximum Transmission Unit
 - different link types, different MTUs
- ❑ large IP datagram can be divided ("fragmented") within the network (internetworking)
 - one datagram becomes several datagrams
 - "reassembled" only at final destination
 - IP header bits used to identify, order related fragments

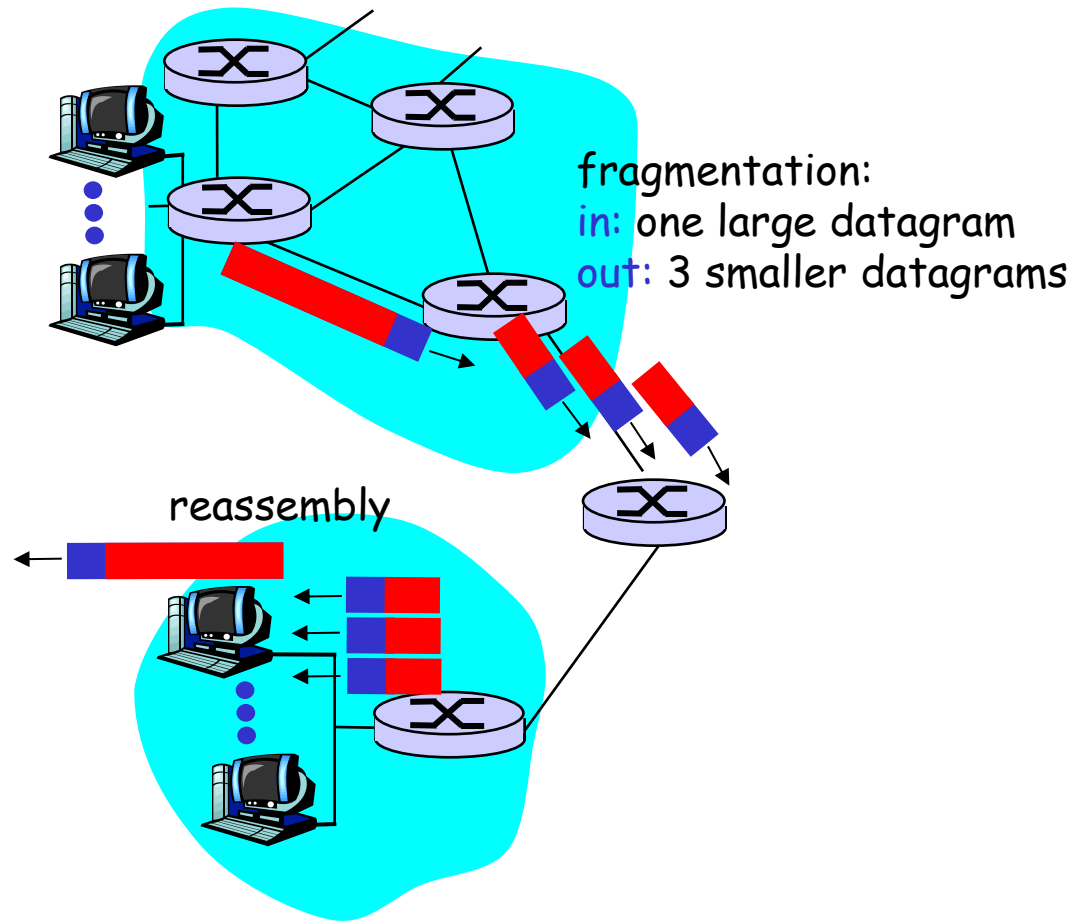

IP Fragmentation and Reassembly

Example

- ❑ 4000 byte datagram
- ❑ MTU = 1500 bytes

	length	ID	morefrag	offset	
	=4000	=x	=0	=0	

One large datagram becomes several smaller datagrams

1480 bytes in data field

offset =
 $1480/8$

	length	ID	morefrag	offset	
	=1500	=x	=1	=0	

	length	ID	morefrag	offset	
	=1500	=x	=1	=185	

	length	ID	morefrag	offset	
	=1040	=x	=0	=370	


ICMP: Internet Control Message Protocol

- ❑ used by hosts & routers to communicate network-level information
 - error reporting: unreachable host, network, port, protocol
 - echo request/reply (used by ping)
- ❑ network-layer "above" IP:
 - ICMP msgs carried in IP datagrams
- ❑ **ICMP message:** type, code plus first 8 bytes of IP datagram causing error

<u>Type</u>	<u>Code</u>	<u>description</u>
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

IPv4 Addressing

- ❑ IP address: 32-bit identifier for host, router *interface*
- ❑ *interface*: connection between host/router and physical link
 - routers typically have multiple interfaces
 - hosts usually have one, but may have multiple interfaces (multi-homed)
 - IP addresses are associated with each interface

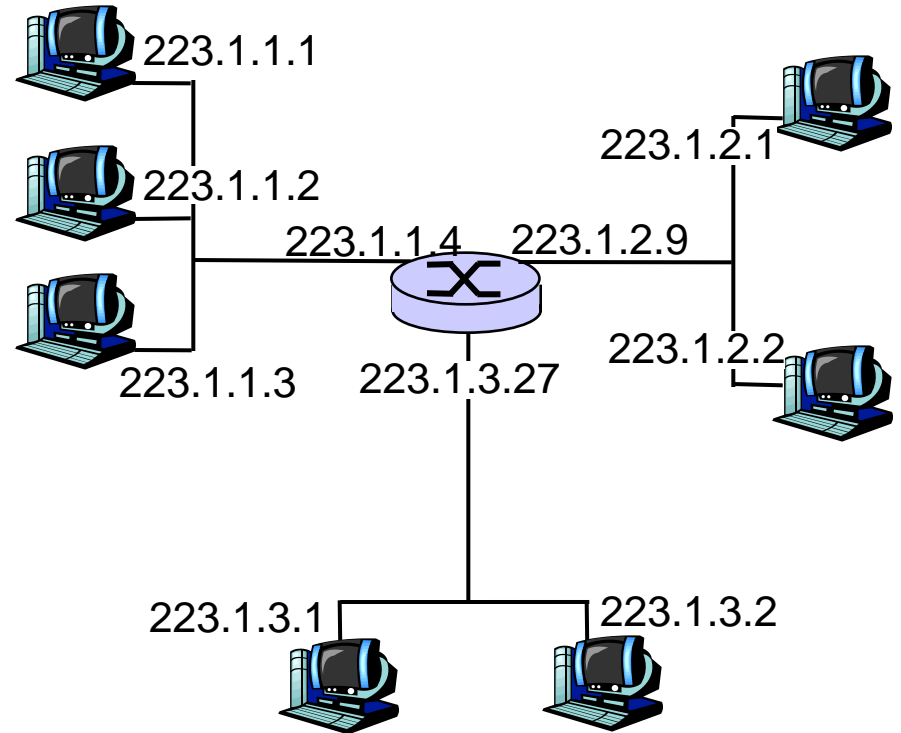

$$223.1.1.1 = \underbrace{11011111}_{223} \underbrace{00000001}_1 \underbrace{00000001}_1 \underbrace{00000001}_1$$

Class-based Addressing

- ❑ IP addresses consist of:
 - Network part
 - Host part
- ❑ IP addresses are divided into five classes: A, B, C, D, and E.
- ❑ Problems ??

0	Network (7 bits)	Host (24 bits)
---	---------------------	----------------

Class A

1	0	Network (14 bits)	Host (16 bits)
---	---	----------------------	-------------------

Class B

110	Network (21 bits)	Host (8 bits)
-----	----------------------	------------------

Class C

1110	Multicast address
------	-------------------

Class D

1111	Future use addresses
------	----------------------

Class E


Subnets: Motivation

- ❑ The “classful” addressing scheme proposes that the network portion of a IP address uniquely identifies one physical network.
 - Any network with more than 255 hosts needs a class B address. Class B addresses can get exhausted before we have 4 billion hosts!
- ❑ Take bits from the host number part to create a “subnet” number (“right sizing”).



Subnets

- ❑ IP address:
 - subnet part (high order bits)
 - host part (low order bits)
- ❑ *What's a subnet?*
 - device interfaces with same subnet part of IP address
 - can physically reach each other without intervening router

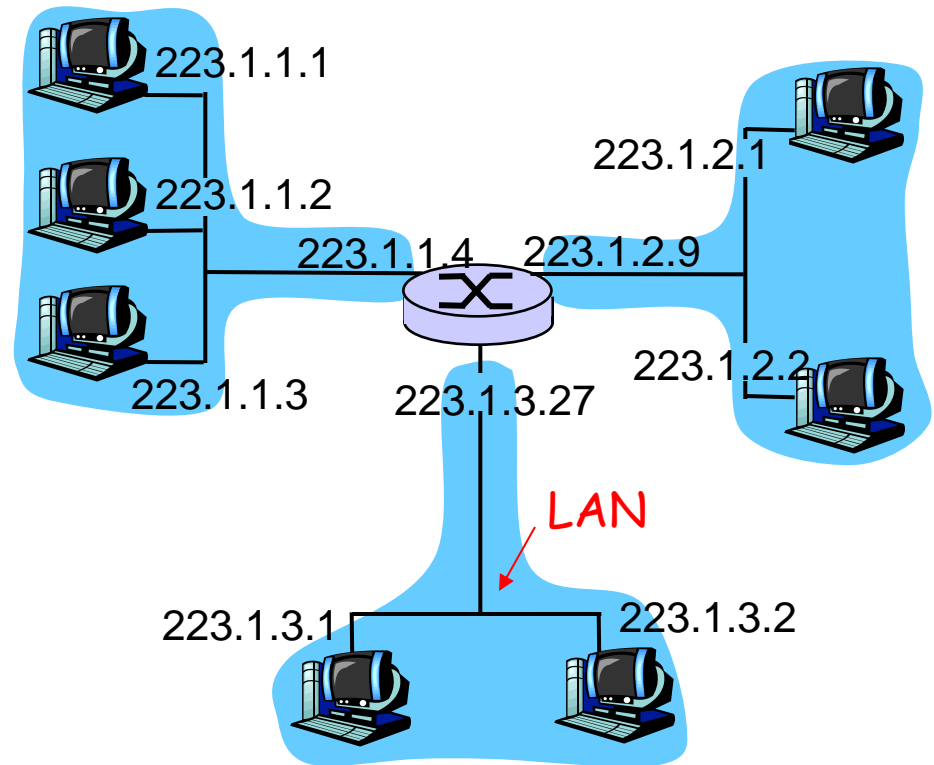


network consisting of 3 subnets

Subnets

Recipe

To determine the subnets:


- ❑ Detach each interface from its host or router, creating islands of isolated networks.
- ❑ Each isolated network is called a **subnet**.

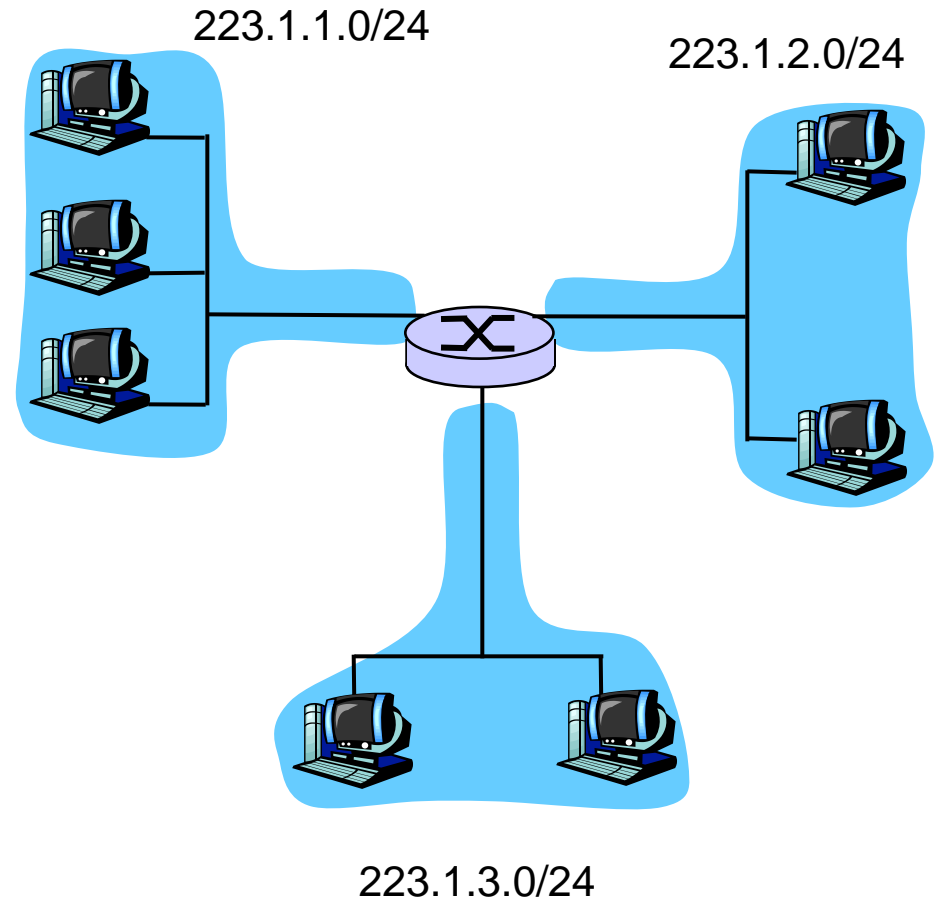

Subnet mask: /24

Subnets


How many?

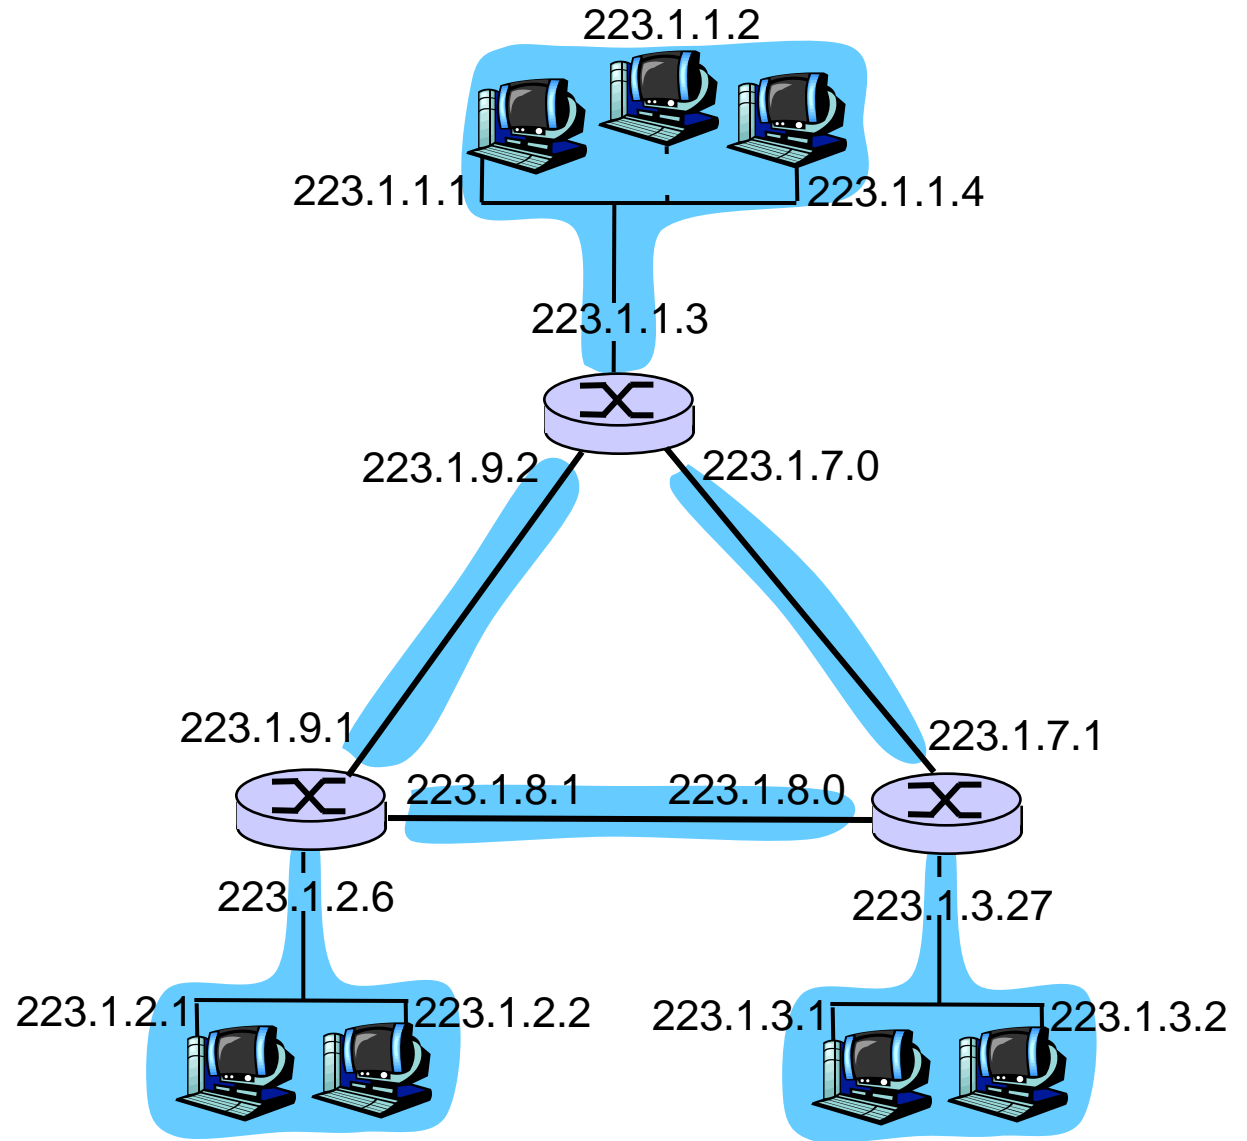

Addressing in the Internet

CIDR: Classless InterDomain Routing

- subnet portion of address of arbitrary length
- address format: $a.b.c.d/x$, where x is # bits in subnet portion of address
- Before CIDR, Internet used a class-based addressing scheme where x could be 8, 16, or 24 bits. These corrsp to classes A, B, and C resp.

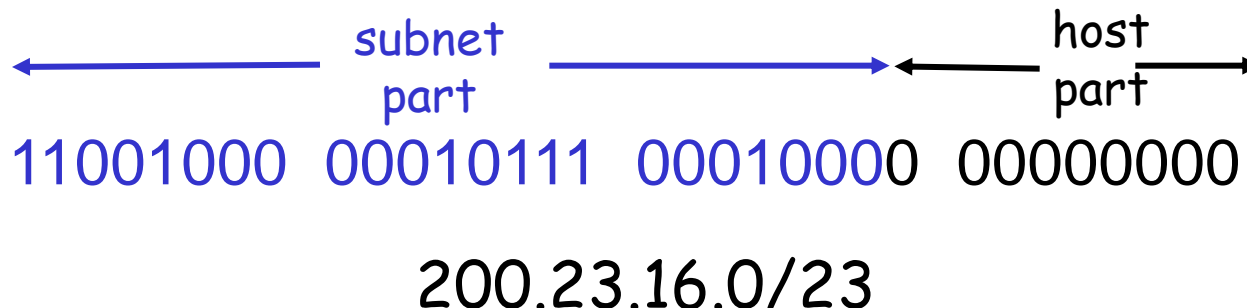

IP addresses: how to get one?

Q: How does *host* get IP address?

- ❑ hard-coded by system admin in a file
 - Wintel: control-panel->network->configuration->tcp/ip->properties
 - UNIX: /etc/rc.config
- ❑ **DHCP: Dynamic Host Configuration Protocol:** dynamically get address from a server
 - this is becoming very popular

IP addresses: how to get one?


Q: How does *network* get subnet part of IP addr?

A: gets allocated portion of its provider ISP's address space

ISP's block	<u>11001000 00010111 00010000</u> 00000000	200.23.16.0/20
Organization 0	<u>11001000 00010111 00010000</u> 00000000	200.23.16.0/23
Organization 1	<u>11001000 00010111 00010010</u> 00000000	200.23.18.0/23
Organization 2	<u>11001000 00010111 00010100</u> 00000000	200.23.20.0/23
...
Organization 7	<u>11001000 00010111 00011110</u> 00000000	200.23.30.0/23

Hierarchical addressing: route aggregation

ISP has an address block; it can further divide this block into sub blocks and assign them to subscriber organizations.

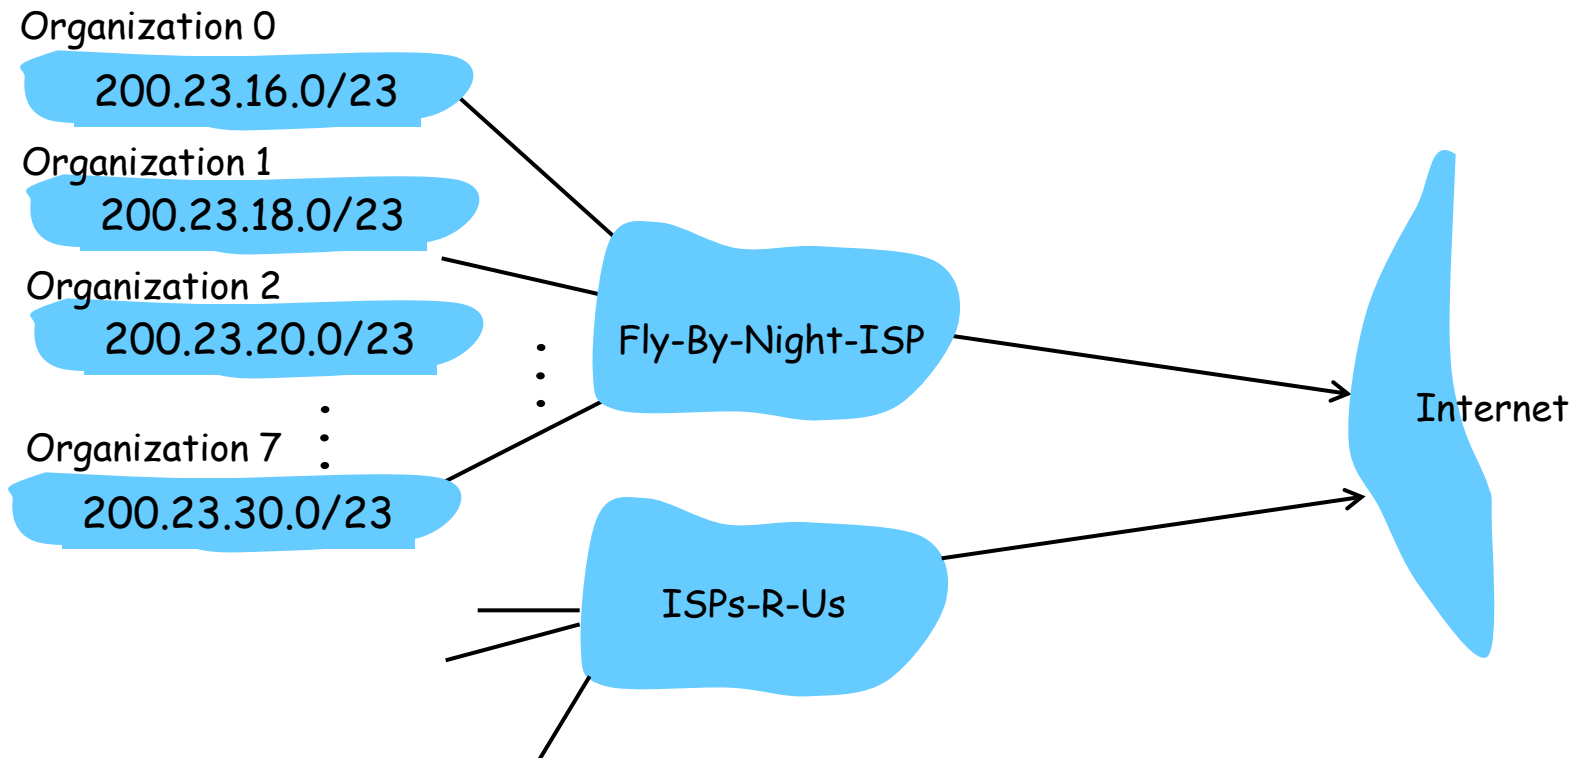

IP addressing: the last word...


Q: How does an ISP get block of addresses?

A: **ICANN**: Internet **C**orporation for **A**ssigned
Names and **N**umbers

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes


Hierarchical addressing: route aggregation

ISP has an address block; it can further divide this block into sub blocks and assign them to subscriber organizations.

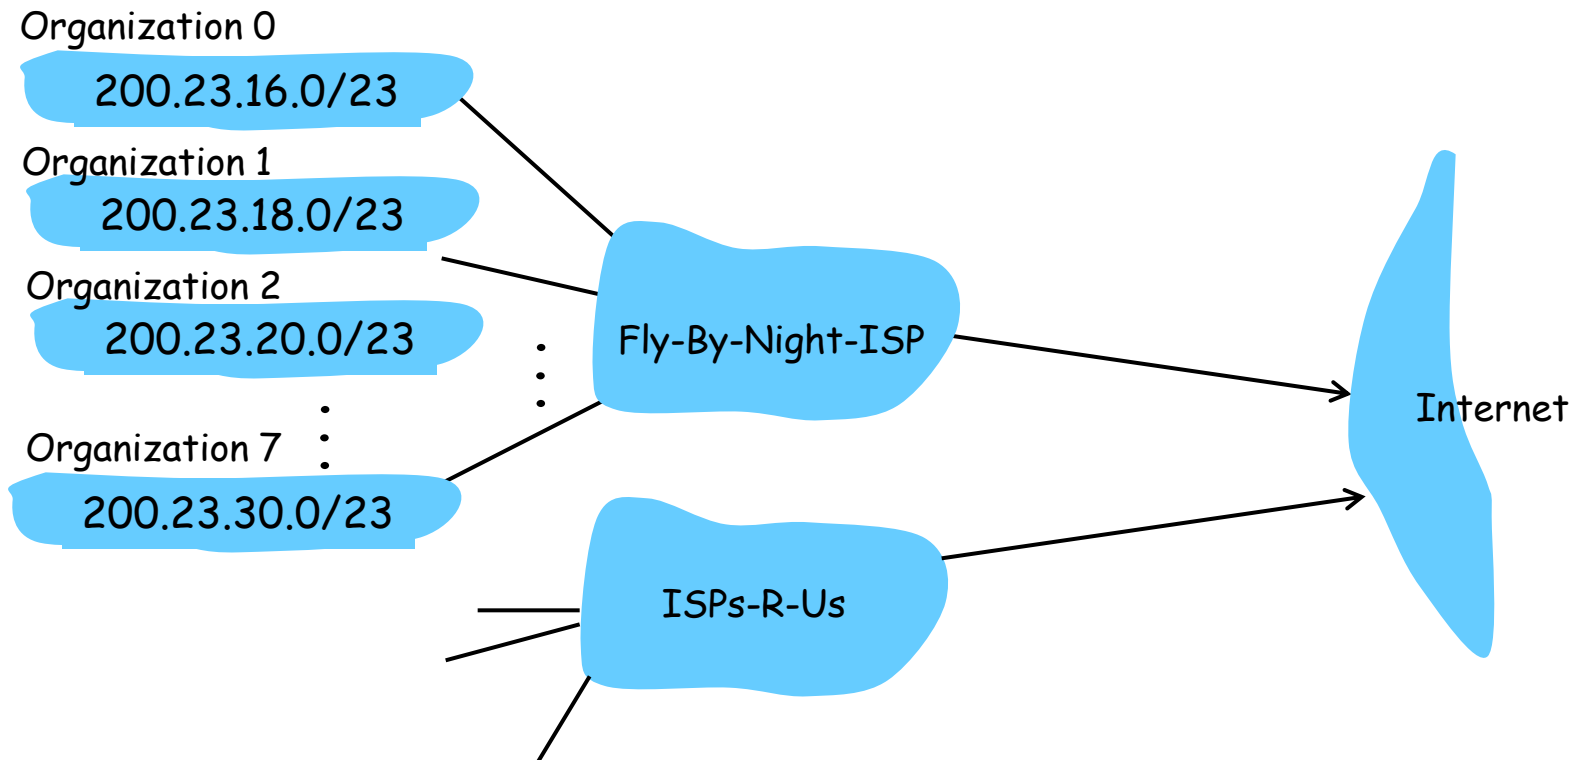

Hierarchical addressing: route aggregation

ISP has an address block; it can further divide this block into sub blocks and assign them to subscriber organizations.

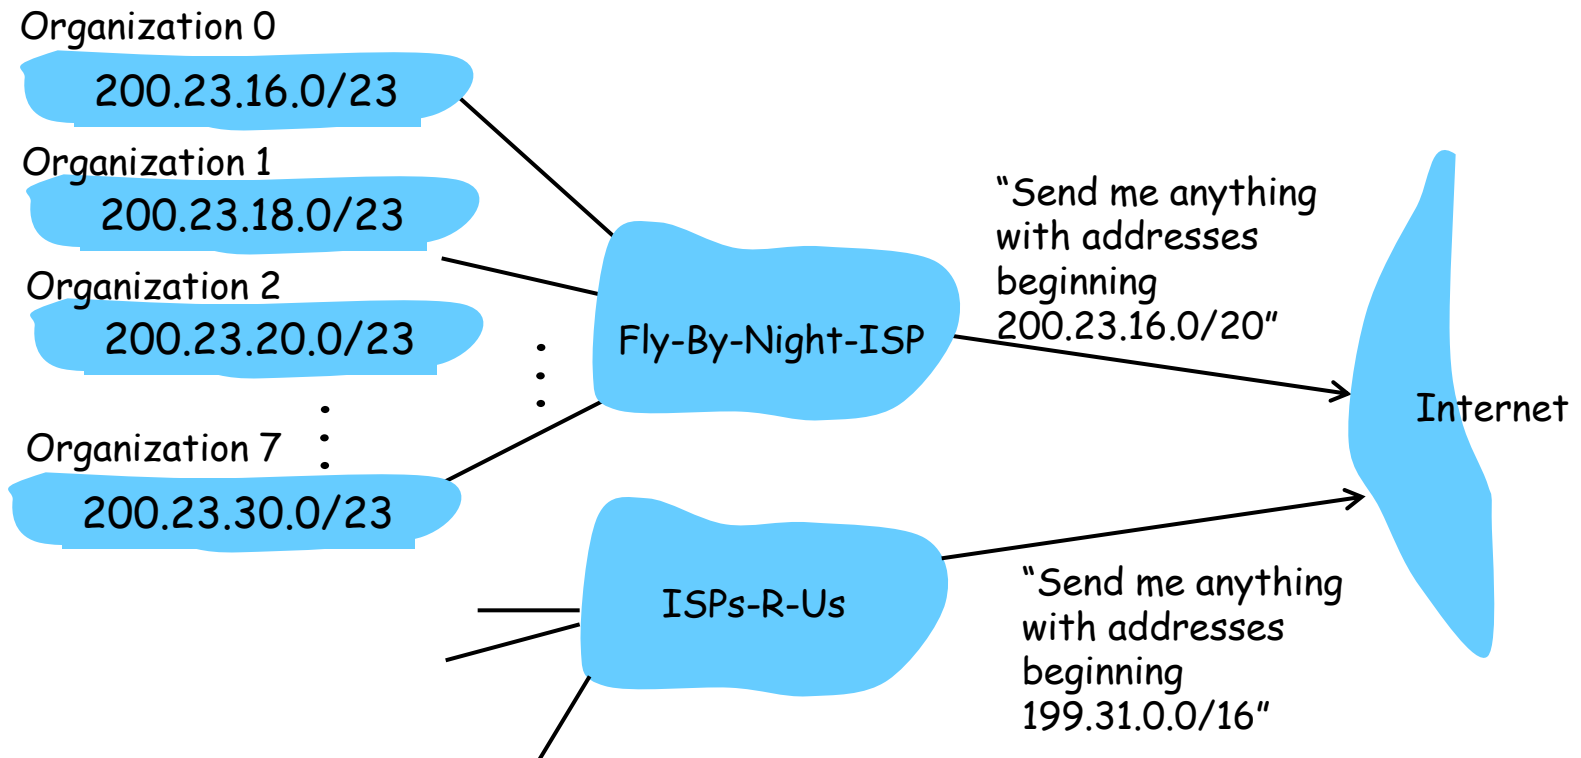

Forwarding: Longest prefix matching

<u>Prefix</u>	<u>Link Interface</u>
200.23.16.0/21	0
200.23.24.0/23	1
200.23.24.0/21	2
otherwise	3

Examples

Dest IP: 200.23.22.161

Which interface?

Dest IP: 200.23.24.172

Which interface?

Forwarding: Longest prefix matching


<u>Prefix Match</u>	<u>Link Interface</u>
11001000 00010111 00010	0
11001000 00010111 0001100	1
11001000 00010111 00011	2
otherwise	3

Examples


Dest IP: 11001000 00010111 00010110 10100001 Which interface?

Dest IP: 11001000 00010111 00011000 10101010 Which interface?

NAT: Network Address Translation

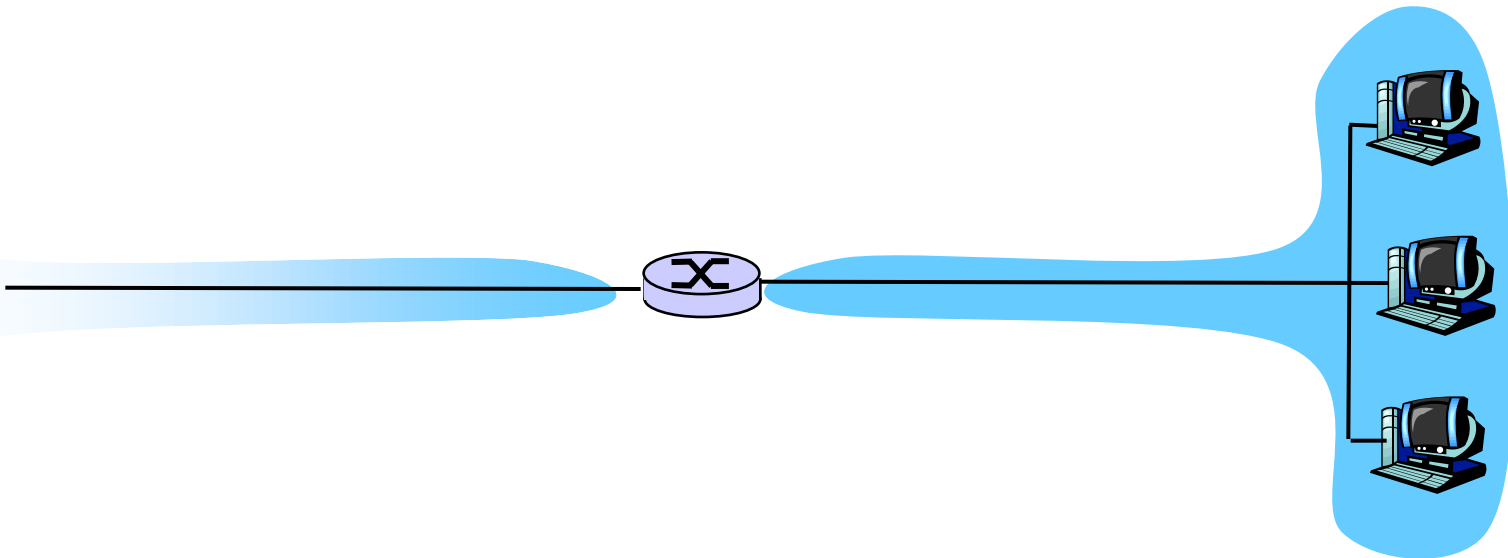

NAT: Network Address Translation

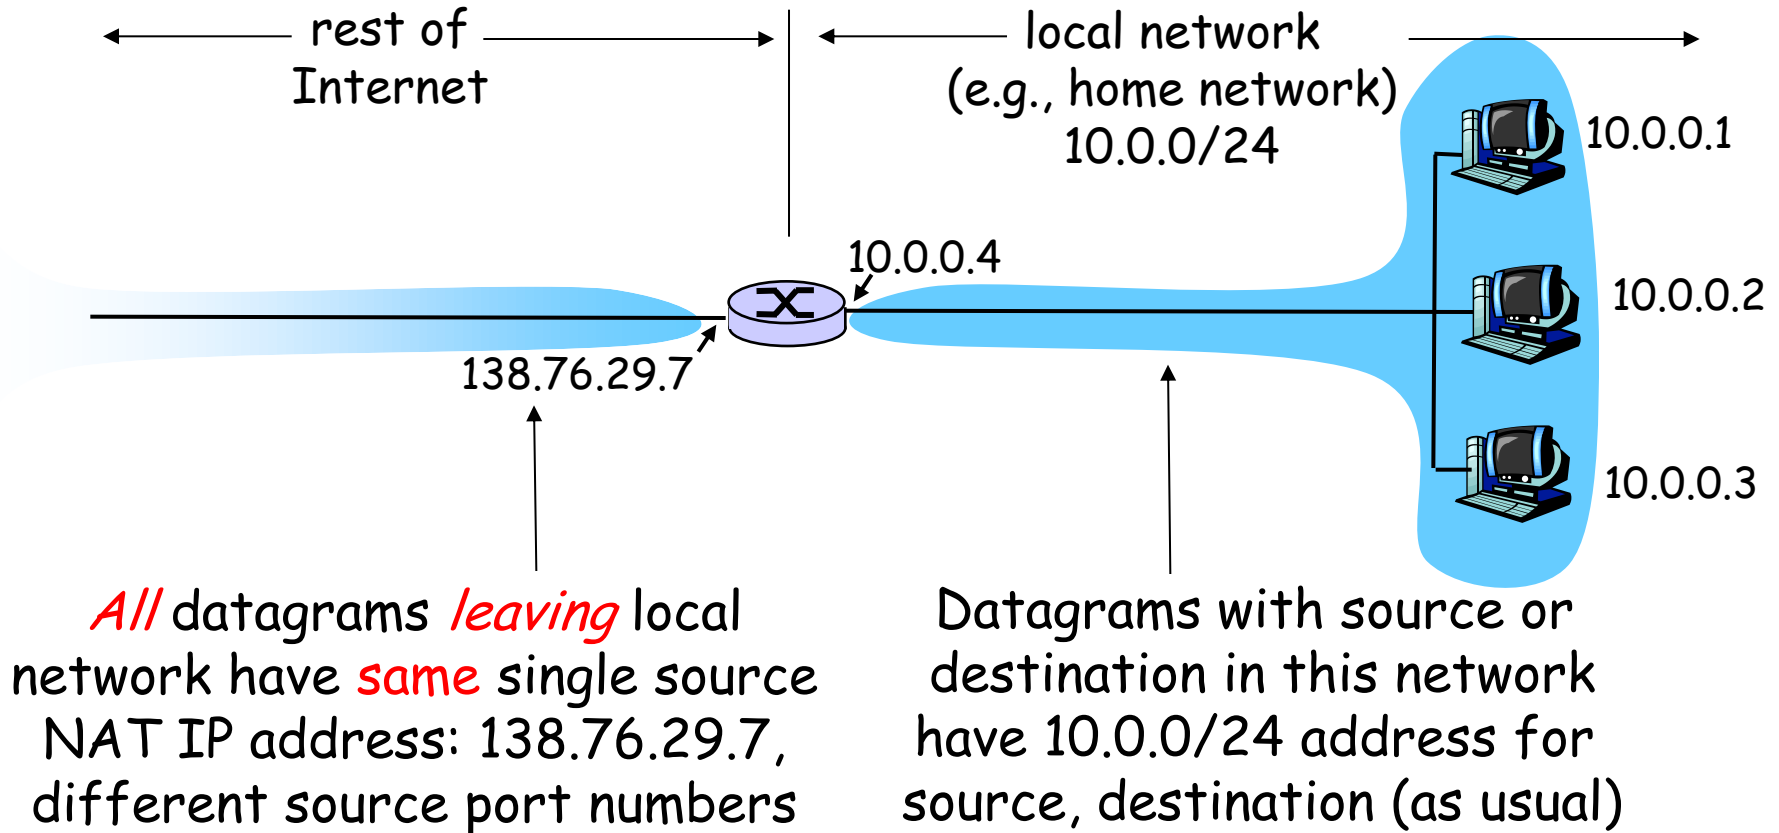

NAT: Network Address Translation

- ❑ **Motivation:** local network uses just one IP address as far as outside world is concerned:
 - no need to be allocated range of addresses from ISP:
 - just one IP address is used for all devices
 - can change addresses of devices in local network without notifying outside world
 - can change ISP without changing addresses of devices in local network
 - devices inside local net not explicitly addressable, visible by outside world (a security plus).

NAT: Network Address Translation

- ❑ NAT is controversial:
 - routers should only process up to layer 3
 - violates end-to-end argument
 - NAT possibility must be taken into account by app designers, eg, P2P applications
 - address shortage should instead be solved by IPv6

IPv6

- ❑ **Initial motivation:** 32-bit address space soon to be completely allocated.
 - ❑ **Additional motivation:**
 - header format helps speed processing/forwarding
 - header changes to facilitate QoS
- IPv6 datagram format:**
- fixed-length 40 byte header
 - no fragmentation allowed


IPv6 Header (Cont)

Priority: identify priority among datagrams in flow

Flow Label: identify datagrams in same "flow."

(concept of "flow" not well defined).

Next header: identify upper layer protocol for data

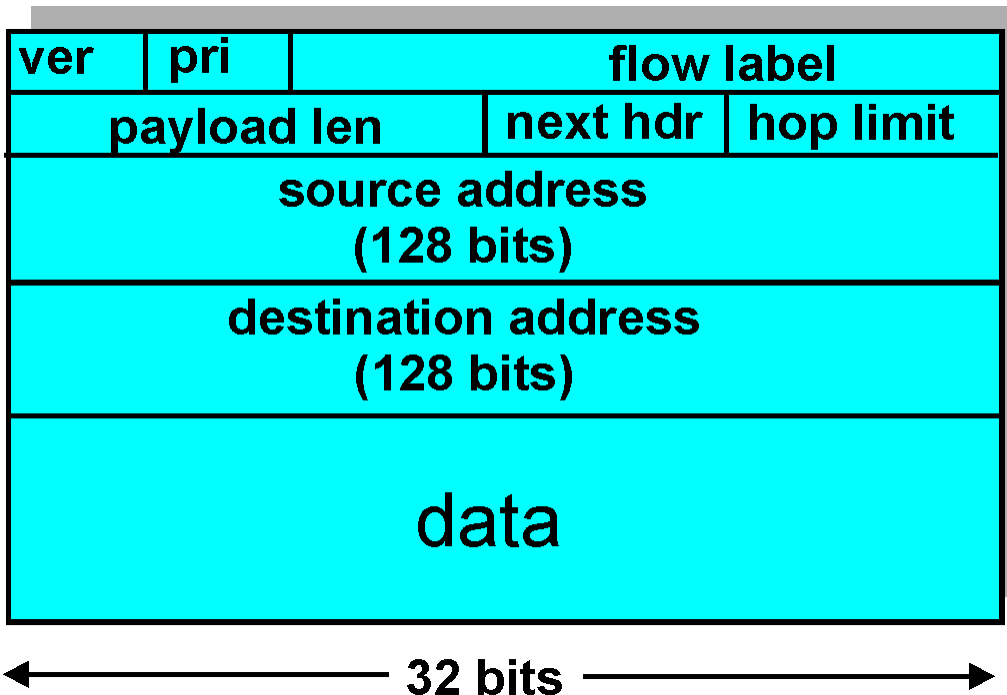

Other Changes from IPv4

- ❑ *Checksum*: removed entirely to reduce processing time at each hop
- ❑ *Options*: allowed, but outside of header, indicated by "Next Header" field
- ❑ *ICMPv6*: new version of ICMP
 - additional message types, e.g. "Packet Too Big"
 - multicast group management functions

Transition From IPv4 To IPv6

- ❑ Not all routers can be upgraded simultaneous
 - no “flag days”
 - How will the network operate with mixed IPv4 and IPv6 routers?
- ❑ *Tunneling*: IPv6 carried as payload in IPv4 datagram among IPv4 routers

Tunneling

