




Ontology Alignment

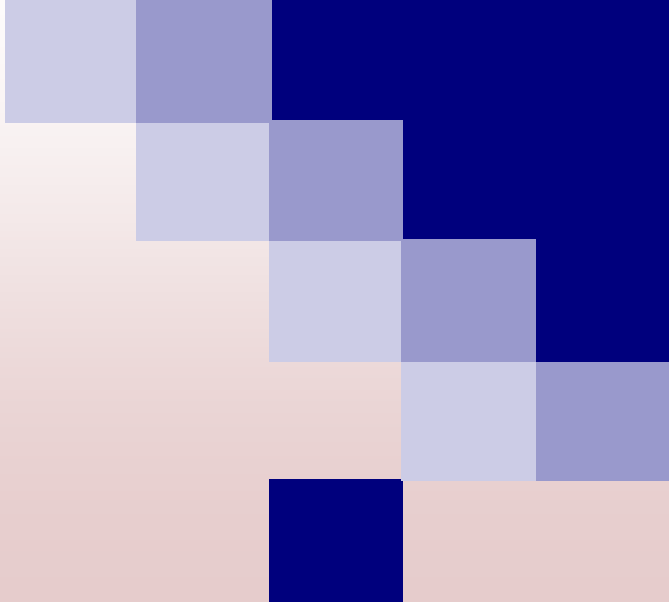



Ontology Alignment

- **Ontology alignment**
- Ontology alignment strategies
- Evaluation of ontology alignment strategies
- Recommending ontology alignment strategies
- Using PRA in ontology alignment
- Current issues




Ontologies in biomedical research

- many biomedical ontologies
e.g. GO, OBO, SNOMED-CT
- practical use of biomedical ontologies
e.g. databases annotated with GO

GENE ONTOLOGY (GO)

immune response
i- acute-phase response
i- anaphylaxis
i- antigen presentation
i- antigen processing
i- cellular defense response
i- cytokine metabolism
i- cytokine biosynthesis
synonym cytokine production
...
p- regulation of cytokine biosynthesis
...
...
i- B-cell activation
i- B-cell differentiation
i- B-cell proliferation
i- cellular defense response
...
i- T-cell activation
i- activation of natural killer cell activity
...




Ontologies with overlapping information

GENE ONTOLOGY (GO)

immune response
i- acute-phase response
i- anaphylaxis
i- antigen presentation
i- antigen processing
i- cellular defense response
i- cytokine metabolism
i- cytokine biosynthesis
synonym cytokine production
...
p- regulation of cytokine biosynthesis
...
...
i- B-cell activation
i- B-cell differentiation
i- B-cell proliferation
i- cellular defense response
...
i- T-cell activation
i- activation of natural killer cell activity
...

SIGNAL-ONTOLOGY (SigO)


Immune Response
i- Allergic Response
i- Antigen Processing and Presentation
i- B Cell Activation
i- B Cell Development
i- Complement Signaling
...
synonym complement activation
i- Cytokine Response
i- Immune Suppression
i- Inflammation
i- Intestinal Immunity
i- Leukotriene Response
i- Leukotriene Metabolism
i- Natural Killer Cell Response
i- T Cell Activation
i- T Cell Development
i- T Cell Selection in Thymus



Ontologies with overlapping information

- Use of multiple ontologies
 - custom-specific ontology + standard ontology
 - different views over same domain
 - overlapping domains
- Bottom-up creation of ontologies
experts can focus on their domain of expertise

→ important to know the inter-ontology relationships




GENE ONTOLOGY (GO)

immune response
i- acute-phase response
i- anaphylaxis
i- antigen presentation
i- antigen processing
i- cellular defense response
i- cytokine metabolism
i- cytokine biosynthesis
synonym cytokine production
...
p- regulation of cytokine
biosynthesis
...
...
i- B-cell activation
i- B-cell differentiation
i- B-cell proliferation
i- cellular defense response
...
i- T-cell activation
i- activation of natural killer
cell activity
...

SIGNAL-ONTOLOGY (SigO)



Immune Response
i- Allergic Response
i- Antigen Processing and Presentation
i- B Cell Activation
i- B Cell Development
i- Complement Signaling
synonym complement activation
i- Cytokine Response
i- Immune Suppression
i- Inflammation
i- Intestinal Immunity
i- Leukotriene Response
i- Leukotriene Metabolism
i- Natural Killer Cell Response
i- T Cell Activation
i- T Cell Development
i- T Cell Selection in Thymus



Ontology Alignment


GENE ONTOLOGY (GO)

SIGNAL-ONTOLOGY (SigO)

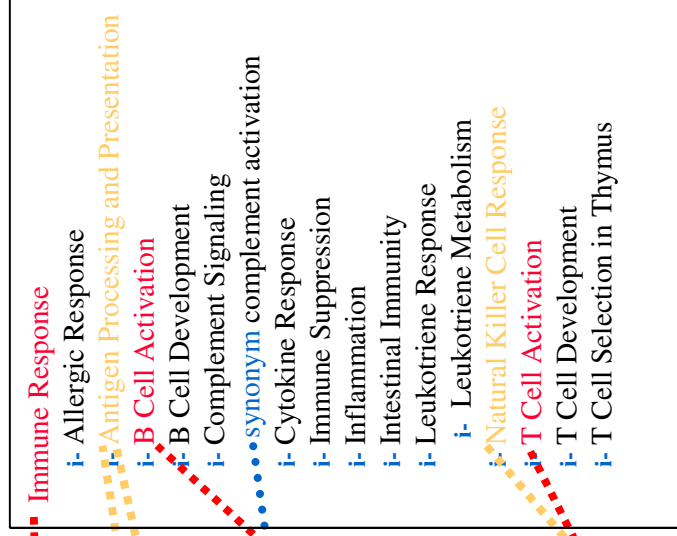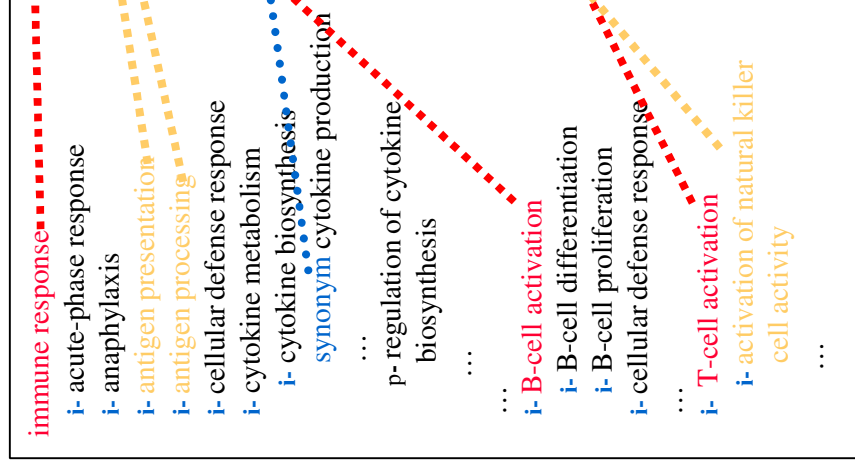

- equivalent concepts
- equivalent relations
- is-a relation


Defining the relations between the terms in different ontologies




Ontology Alignment

- Ontology alignment
- **Ontology alignment strategies**
- Evaluation of ontology alignment strategies
- Recommending ontology alignment strategies
- Using PRA in ontology alignment
- Current issues

An Alignment Framework

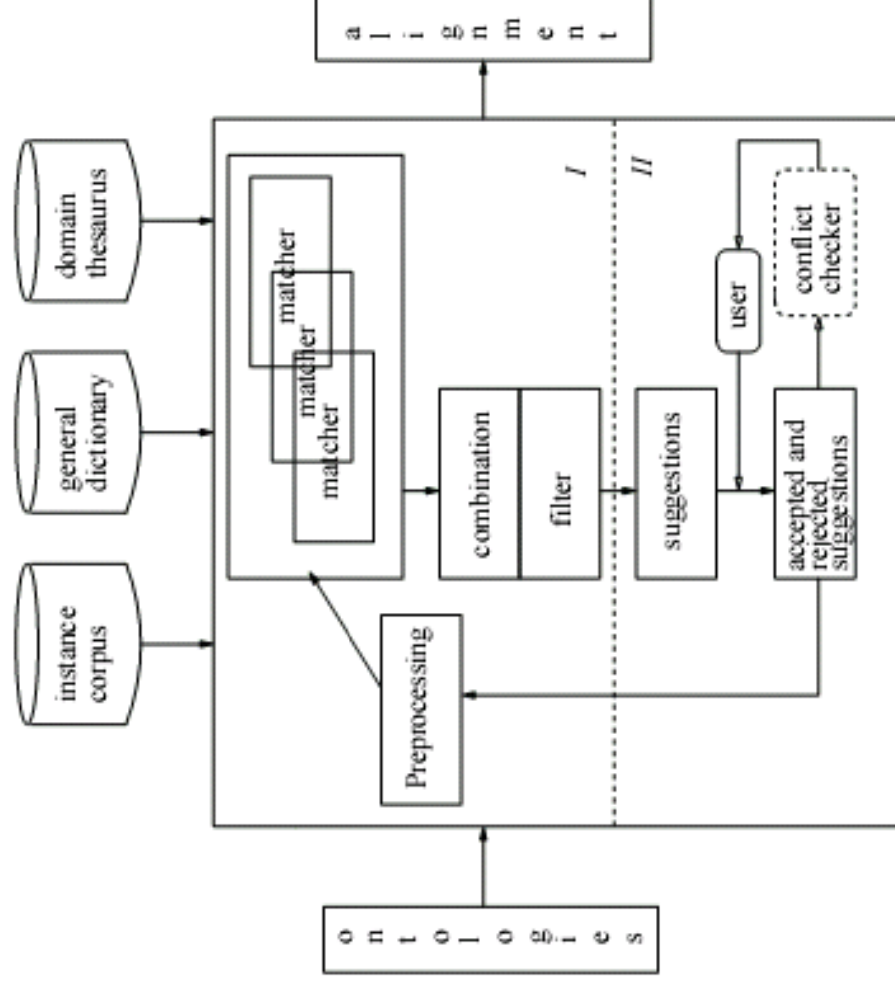





Classification

- According to input
 - KR: OWL, UML, EER, XML, RDF, ...
 - components: concepts, relations, instance, axioms
- According to process
 - What information is used and how?
- According to output
 - 1-1, m-n
 - Similarity vs explicit relations (equivalence, is-a)
 - confidence

Preprocessing

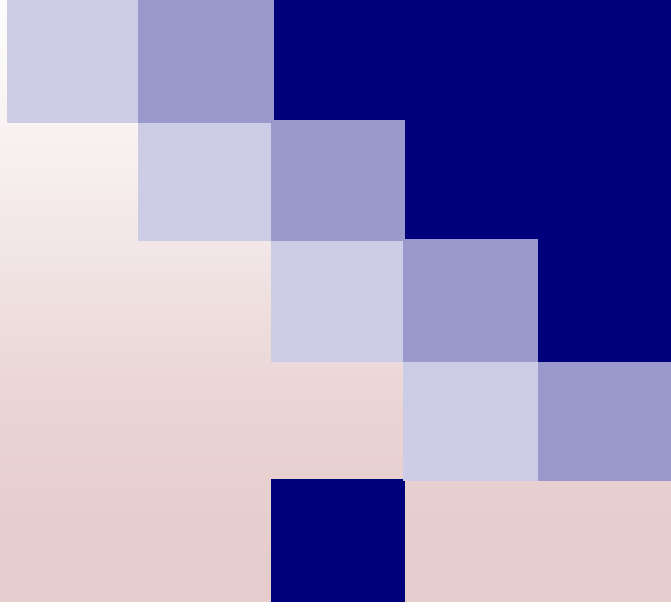




Preprocessing

For example,


- Selection of features
- Selection of search space


Matchers

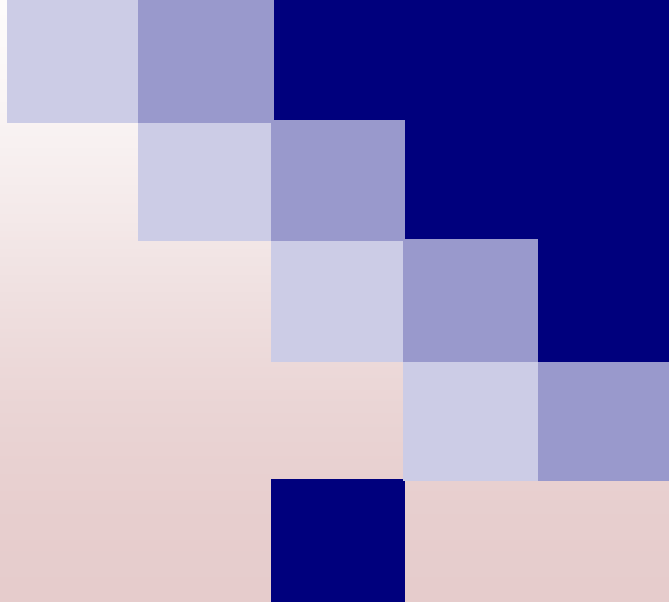

Matcher Strategies

- Strategies based on linguistic matching
- Structure-based strategies
- Constraint-based
- Instance-based
- Use of auxiliary

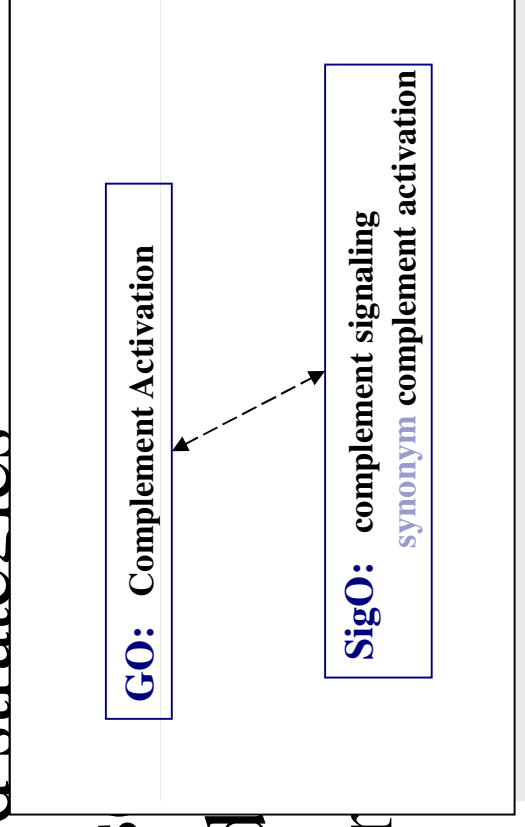



Example matchers

■ Edit distance


- Number of deletions, insertions, substitutions required to transform one string into another
- `aaaa → baab`: edit distance 2


■ N-gram

- N-gram : N consecutive characters in a string
- Similarity based on set comparison of n-grams
- `aaaa : {aa, aa, aa}`; `baab : {ba, aa, ab}`

Matcher Strategies



- Strategies based on linguistic matching
- **Structure-based strategies**
- Constraint-based
- Instance-based strategies
- Use of auxiliary

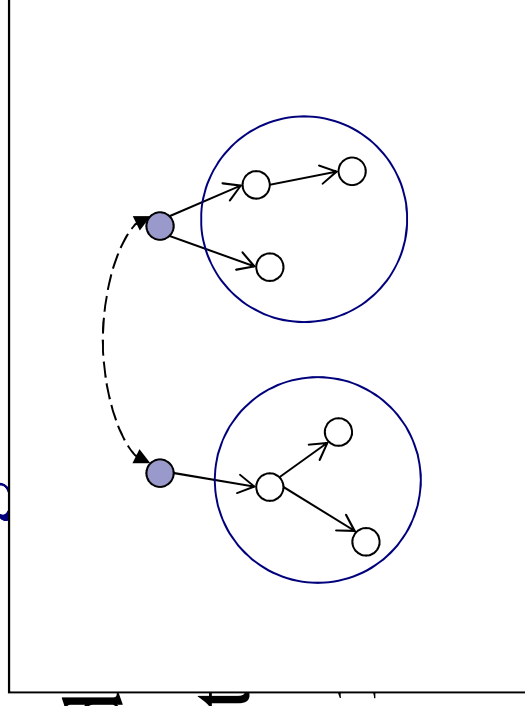




Example matchers

- Propagation of similarity values
- Anchored matching

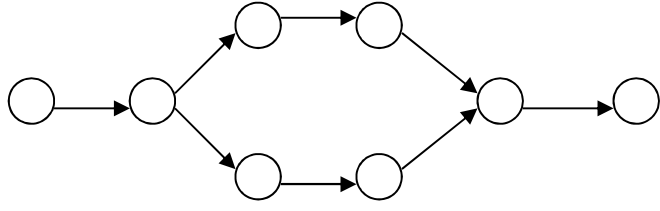


Example matchers

- Propagation of similarity values
- Anchored matching

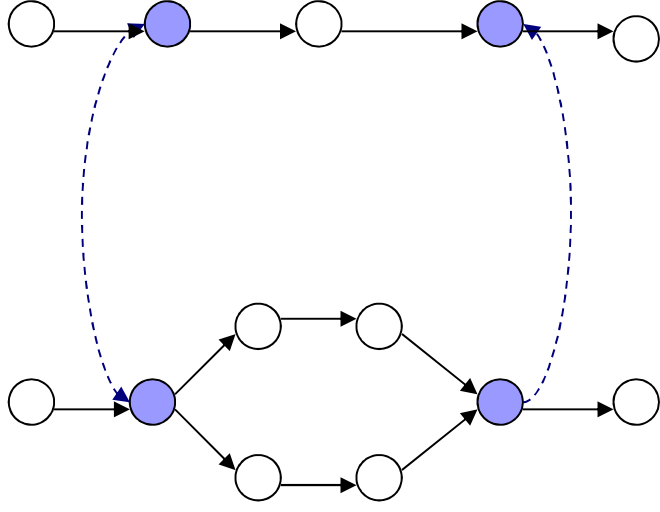


Example matchers

- Propagation of similarity values
- Anchored matching

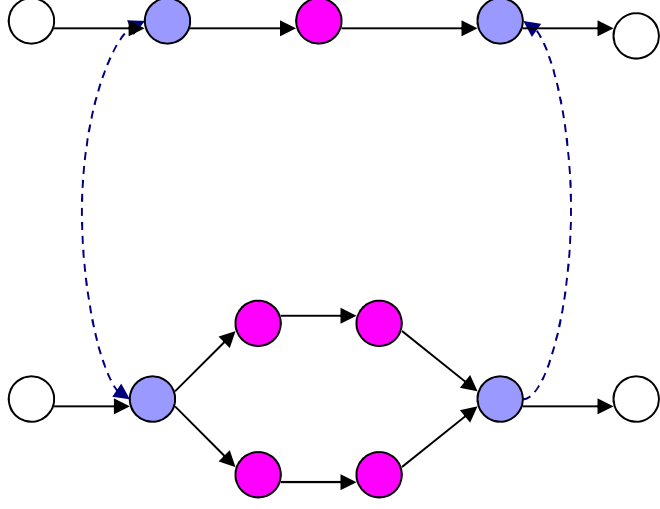


Matcher Strategies

- Strategies based on linguistic matching
- Structure-based strategies
- Constraint-based approaches
- Instance-based s
- Use of auxiliary

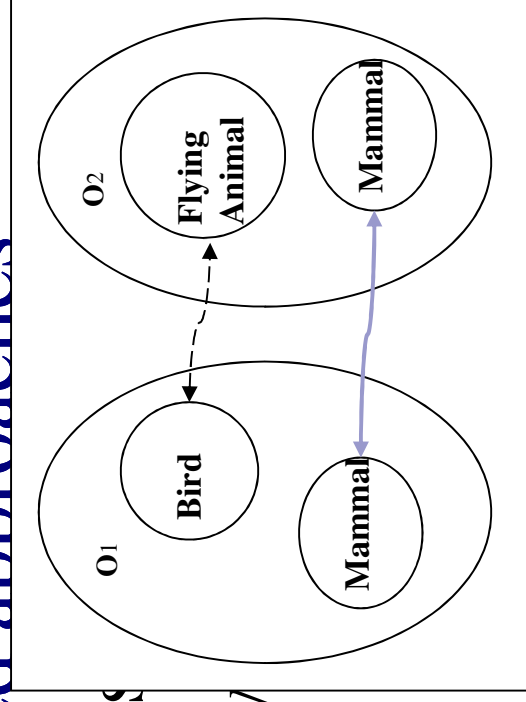

Matcher Strategies

- Strategies based on linguistic matching
- Structure-based strategies
- Constraint-based approaches
- Instance-based s
- Use of auxiliary

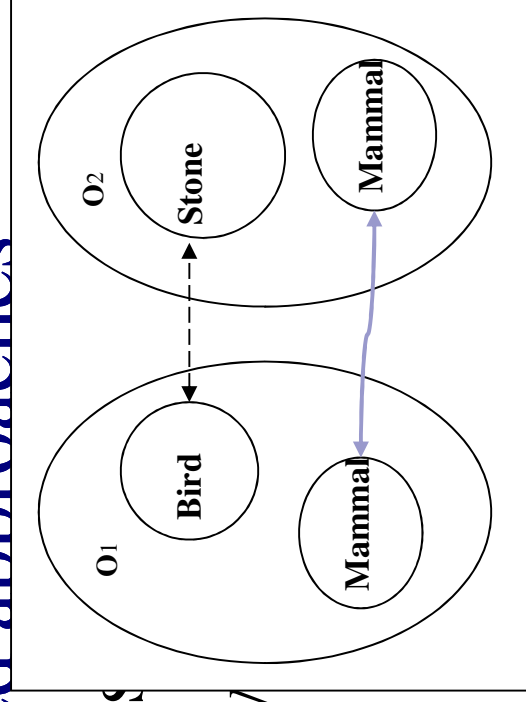





Example matchers

- Similarities between data types
- Similarities based on cardinalities

Matcher Strategies

- Strategies based on linguistics
- Structure-based strategies
- Constraint-based approaches
- **Instance-based strategies**
- Use of auxiliary information

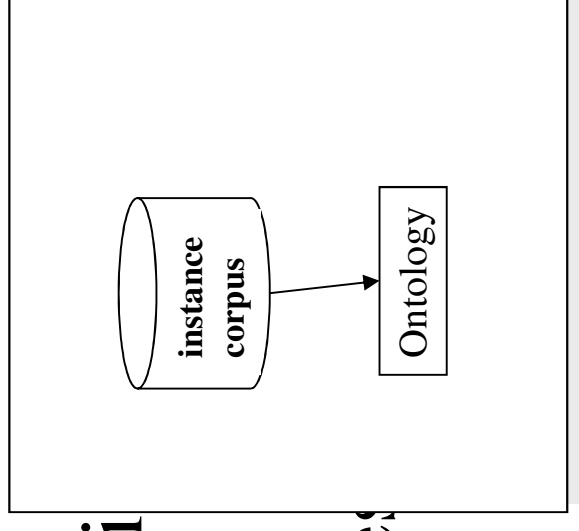



Example matchers

- Instance-based
- Use life science literature as instances
- Structure-based extensions



Learning matchers – instance-based strategies


- Basic intuition

A similarity measure between concepts can be computed based on the probability that documents about one concept are also about the other concept and vice versa.

- Intuition for structure-based extensions


Documents about a concept are also about their super-concepts.

(No requirement for previous alignment results.)



Learning matchers - steps


- Generate corpora
 - Use concept as query term in PubMed
 - Retrieve most recent PubMed abstracts
- Generate text classifiers
 - One classifier per ontology / One classifier per concept
- Classification
 - Abstracts related to one ontology are classified by the other ontology's classifier(s) and vice versa
- Calculate similarities



Basic Naïve Bayes matcher

- Generate corpora
- Generate classifiers
 - Naive Bayes classifiers, one per ontology
- Classification
 - Abstracts related to one ontology are classified to the concept in the other ontology with highest posterior probability $P(C|d)$
- Calculate similarities

$$sim(C_1, C_2) = \frac{n_{NBC2}(C_1, C_2) + n_{NBC1}(C_2, C_1)}{n_D(C_1) + n_D(C_2)}$$



Basic Support Vector Machines


matcher


- Generate corpora
- Generate classifiers
 - SVM-based classifiers, one per concept
- Classification
 - Single classification variant: Abstracts related to concepts in one ontology are classified to the concept in the other ontology for which its classifier gives the abstract the highest positive value.
 - Multiple classification variant: Abstracts related to concepts in one ontology are classified all the concepts in the other ontology whose classifiers give the abstract a positive value.
- Calculate similarities

$$\frac{n_{SVMC-C_2}(C_1, C_2) + n_{SVMC-C_1}(C_2, C_1)}{n_D(C_1) + n_D(C_2)}$$

Structural extension ‘C1’

- Generate classifiers
 - Take (is-a) structure of the ontologies into account when building the classifiers
 - Extend the set of abstracts associated to a concept by adding the abstracts related to the sub-concepts

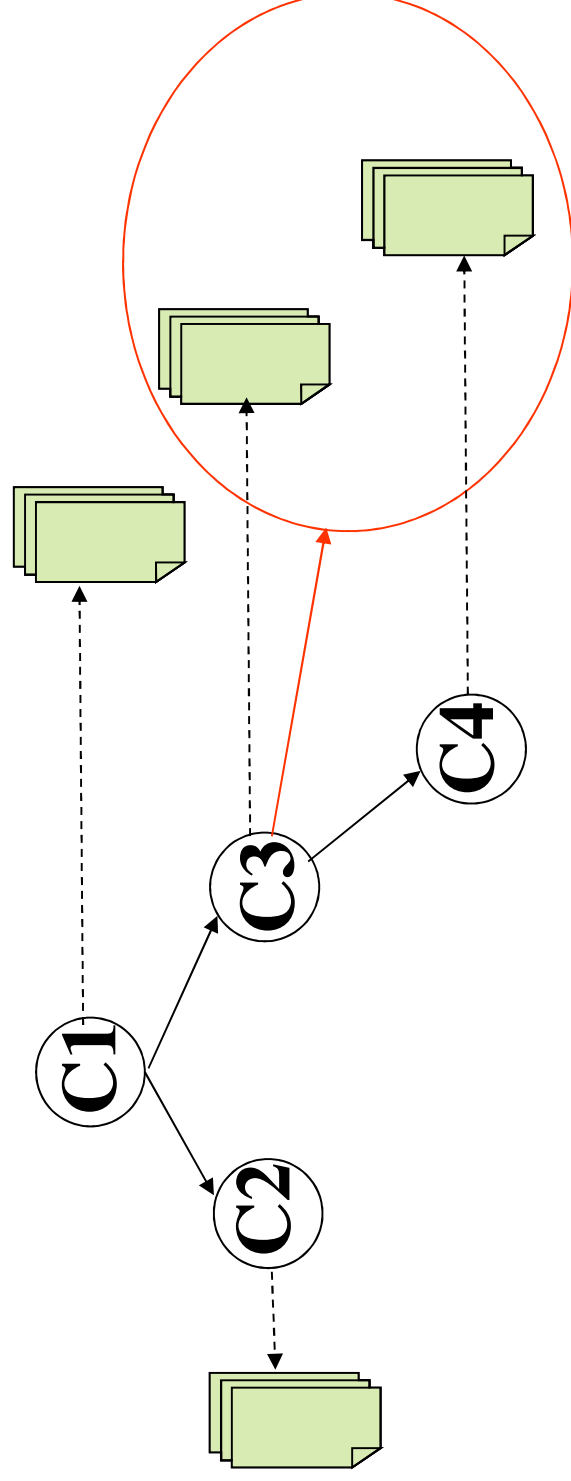




Structural extension ‘Sim’


- Calculate similarities
 - Take structure of the ontologies into account when calculating similarities
 - Similarity is computed based on the classifiers applied to the concepts and their sub-concepts

$$sim_{struct}(C_1, C_2) = \frac{\sum_{C_i \subseteq C_1, C_j \subseteq C_2} n_{NBC2}(C_i, C_j) + \sum_{C_i \subseteq C_1, C_j \subseteq C_2} n_{NBC1}(C_j, C_i)}{\sum_{C_i \subseteq C_1} n_D(C_i) + \sum_{C_j \subseteq C_2} n_D(C_j)}$$

Matcher Strategies

- Strategies based linguistic
- Structure-based strategies
- Constraint-based approaches
- Instance-based strategies
- Use of auxiliary information

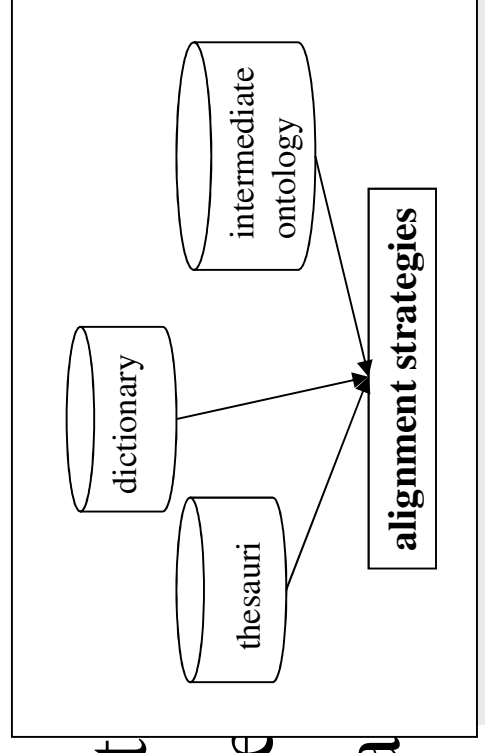




Example matchers


- Use of WordNet
 - Use WordNet to find synonyms
 - Use WordNet to find ancestors and descendants in the is-a hierarchy
- Use of Unified Medical Language System (UMLS)
 - Includes many ontologies
 - Includes many alignments (not complete)
 - Use UMLS alignments in the computation of the similarity values

	linguistic	structure	constraints	instances	auxiliary
ArtGen	name	parents, children		domain specific documents	WordNet
ASCO	name, label description	parents, children, siblings, path from root			WordNet
Chimaera	name	parents, children			
FCA-Merge	name			domain specific documents	
FOAM	name, label	parents, children	equivalence		
GLUE	name	neighborhood		instances	
HCONE	name	parents, children			WordNet
IF-Map				instances	a reference ontology
iMapper		leaf, non-leaf, children, related node	domain, range	instances	WordNet
OntoMapper		parents, children		documents	
(Anchor-) PROMPT	name	direct graphs			
SAMBO	name, synonym	is-a and part-of, descendants and ancestors		domain specific documents	WordNet, UMLS
S-Match	label	path from root	semantic relations codified in labels		WordNet

Ontology Alignment and Merging Systems

Combinations

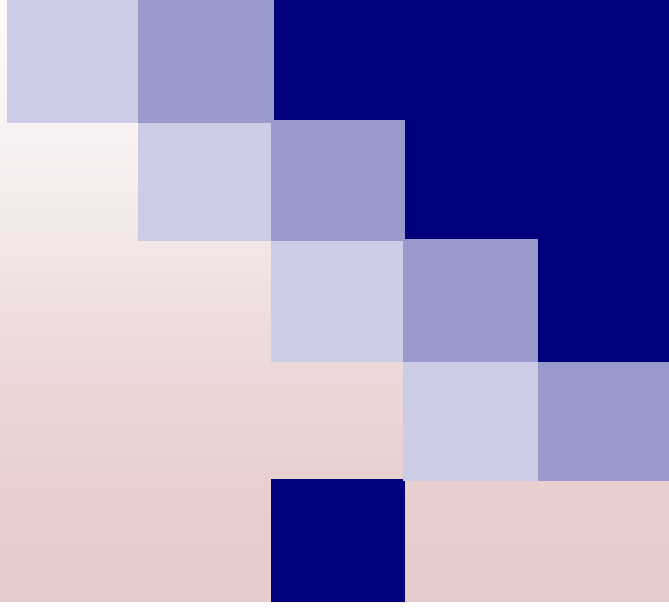




Combination Strategies

- Usually weighted sum of similarity values of different matchers
- Maximum of similarity values of different matchers


Filtering

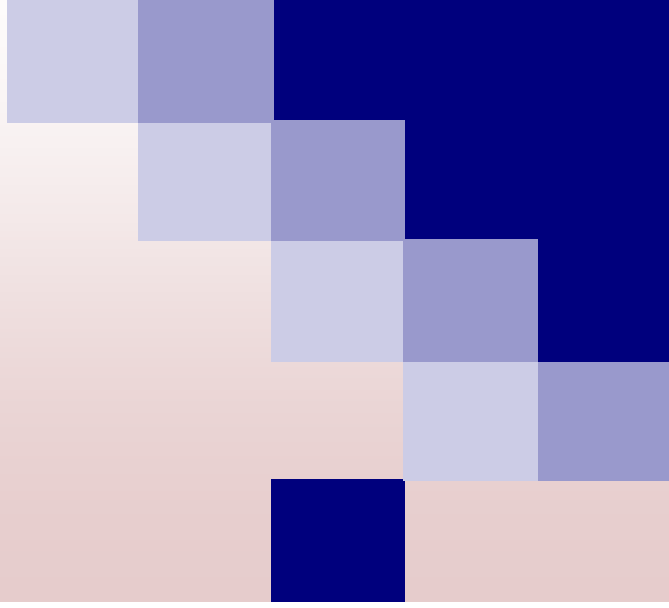

Filtering techniques

- Threshold filtering


Pairs of concepts with similarity higher or equal than threshold are alignment suggestions

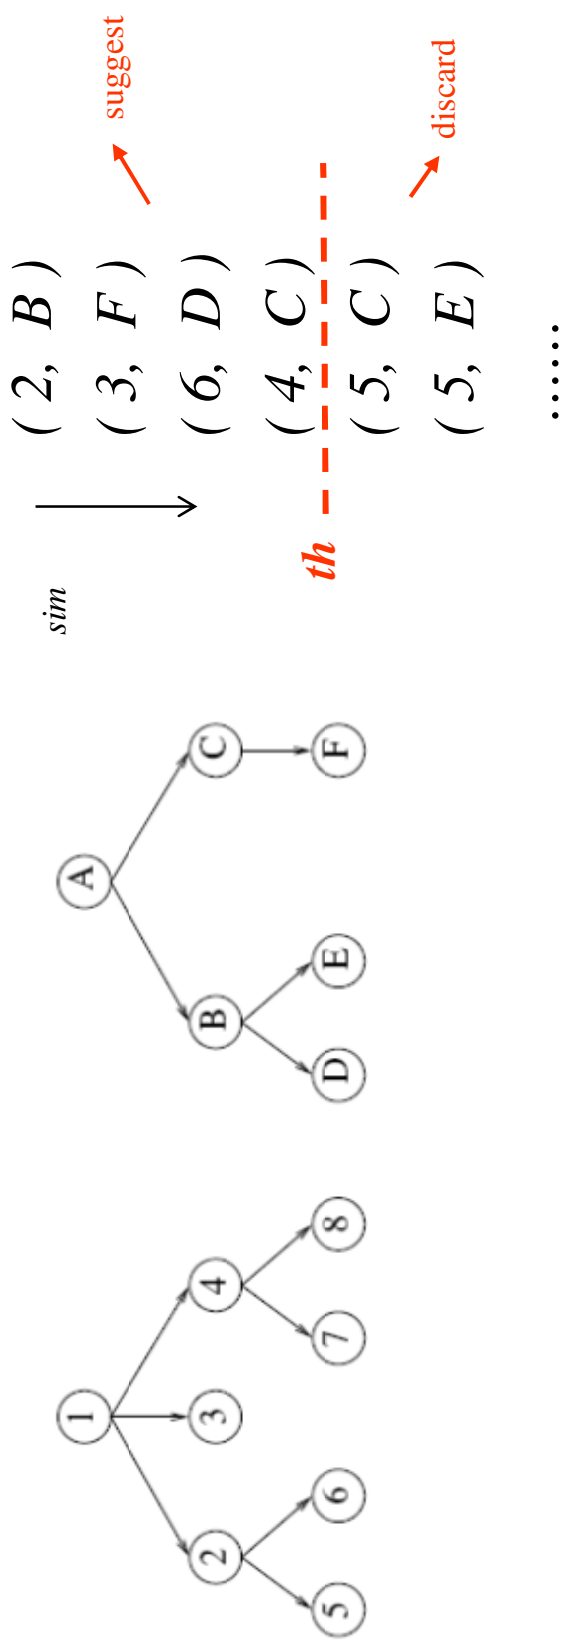

Filtering techniques

■ Double threshold filtering

- (1) Pairs of concepts with similarity higher than or equal to **upper** threshold are alignment suggestions
- (2) Pairs of concepts with similarity between **lower** and **upper** thresholds are alignment suggestions if they make sense with respect to the structure of the ontologies and the suggestions according to (1)

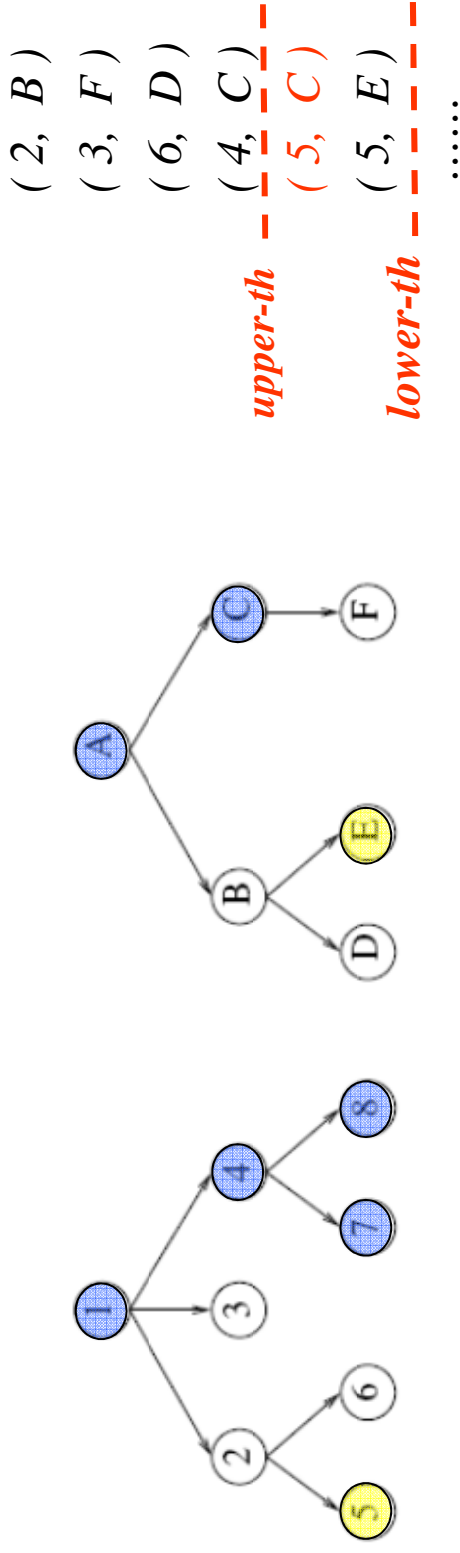

Example alignment system

SAMBO – matchers, combination, filter

The screenshot shows the SAMBO web interface. At the top, there is a progress bar with three stages: 'start', 'relation', and 'finish'. The 'start' stage is currently active. Below the progress bar, the main heading reads 'Align Concept in **Ontology-1** and **Ontology-2**'. Under this heading, there are five rows of matchers, each with a weight input field (all set to 1.0) and a checkbox. The first row is 'Terminology' with a checked checkbox. The second row is 'Term. + WordNet' with an unchecked checkbox. The third row is 'Domain (UMLS)' with an unchecked checkbox. The fourth row is 'Learning' with an unchecked checkbox. The fifth row is 'Structure' with an unchecked checkbox. To the right of these matchers is a 'threshold:' label followed by an input field set to '0.6'. At the bottom right of the interface are two buttons: 'Start' and 'Finish'.


start relation finish

Align Concept in **Ontology-1** and **Ontology-2**

matchers: ☒ Terminology ☐ Term. + WordNet ☐ Domain (UMLS) ☐ Learning ☐ Structure

threshold:

Start Finish



Example alignment system

SAMBO – suggestion mode

nose_MA	nose_MeSH
nasal_cavity_epithelium definition: MA:0001324 synonym: nasal mucosa part-of: nasal_cavity	nasal_mucosa definition: MESH:A.04.531.520 synonym: nasal epithelium part-of:
new name for the equivalent concepts:	
nasal_cavity_epithelium nasal_mucosa	
=> Equiv. Concepts <=> Sub-Concept >=> Super-Concept << Undo >> Skip to Next	

Example alignment system

SAMBO – manual mode

The screenshot displays the SAMBO manual mode interface. It features a hierarchical tree of concepts for two different sources: 'nose_MeSH' and 'nose_MIA'. The 'nose_MeSH' tree is on the right, and the 'nose_MIA' tree is on the left. The 'nose_MeSH' tree has a root node 'nose' (blue circle) with children: 'Onasal_bone' (green circle), 'H_nasal_cavity (nasal_cavity)' (green circle), 'Onasal_mucosa' (green circle), 'Olfactory_mucosa' (green circle), 'Ogoblet_cell' (green circle), 'Olfactory_receptor_neuron' (green circle), 'Onasal_septum' (green circle), 'Oparranasal_sinus' (green circle), and 'Oturbinate' (green circle). The 'nose_MIA' tree has a root node 'nose' (blue circle) with children: 'Onaris' (pink circle), 'Oexternal_naris' (green circle), 'Ointernal_naris' (green circle), 'Onasal_capsule' (pink circle), 'H_nasal_cavity (nasal_cavity)' (pink circle), 'Onasal_cavity_epithelium' (pink circle), 'Onasal_septum' (pink circle), 'Onasal_turbinate' (pink circle), 'Ofactory_gland' (pink circle), 'Ofactory_nerves' (pink circle), and 'Vomerocranial_organ' (pink circle). Below the trees, there is a 'Concept Name:' label, a search input field, and a 'search' button. At the bottom, there are buttons for 'ex Unids', 'Equip Concept', 'Sub-Concept', 'Super-Concept', and a 'Suppression Align' button.

nose_MeSH

- nose
 - ├─ ○ nasal_bone
 - ├─ H nasal_cavity (nasal_cavity)
 - ├─ ○ nasal_mucosa
 - ├─ ─ Olfactory_mucosa
 - ├─ ─ Goblet_cell
 - ├─ ─ Olfactory_receptor_neuron
 - ├─ ○ nasal_septum
 - ├─ ○ paranasal_sinus
 - └─ ○ turbinate


nose_MIA

- nose
 - ├─ p- ○ naris
 - ├─ ─ O external_naris
 - ├─ ─ O internal_naris
 - ├─ p- ○ nasal_capsule
 - ├─ p- H nasal_cavity (nasal_cavity)
 - ├─ p- ─ nasal_cavity_epithelium
 - ├─ p- ○ nasal_septum
 - ├─ p- ○ nasal_turbinate
 - ├─ p- ○ olfactory_gland
 - ├─ p- ○ olfactory_nerves
 - ├─ p- ○ vomeronasal_organ

1 Concept Name: search

ex Unids Equip Concept Sub-Concept Super-Concept

Suppression Align



Ontology Alignment


- Ontology alignment
- Ontology alignment strategies
- Evaluation of ontology alignment strategies
- Recommending ontology alignment strategies
- Using PRA in ontology alignment
- Current issues




Evaluation measures

- Precision:
$$\frac{\text{\# correct suggested alignments}}{\text{\# suggested alignments}}$$
- Recall:
$$\frac{\text{\# correct suggested alignments}}{\text{\# correct alignments}}$$
- F-measure: combination of precision and recall


Ontology Alignment Evaluation Initiative

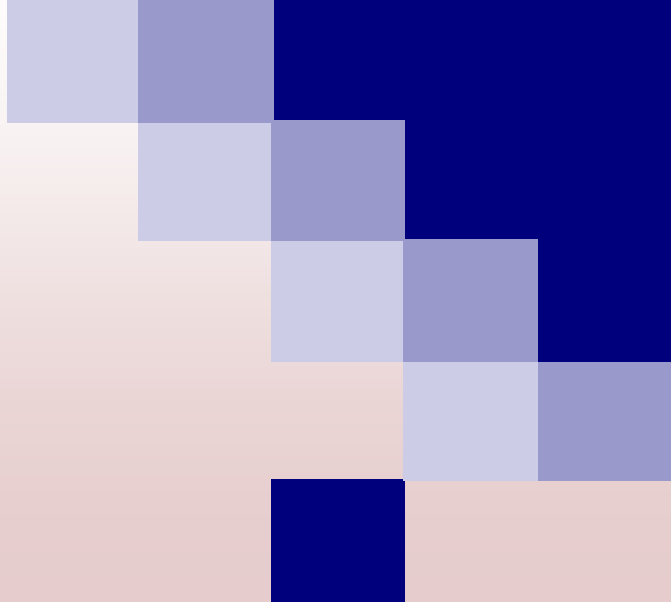




OAEI

- Since 2004
- Evaluation of systems
- Different tracks
 - comparison: benchmark (open)
 - expressive: anatomy (blind), fisheries (expert)
 - directories and thesauri: directory, library, crosslingual resources (blind)
 - consensus: conference




OAEI

- Evaluation measures
 - Precision/recall/f-measure
 - recall of non-trivial mappings
 - full / partial golden standard




OAEI 2007

- 17 systems participated
 - benchmark (13)
 - ASMOV: p = 0.95, r = 0.90
 - anatomy (11)
 - AOAS: f = 0.86, r+ = 0.50
 - SAMBO: f = 0.81, r+ = 0.58
 - library (3)
 - Thesaurus merging: FALCON: p = 0.97, r = 0.87
 - Annotation scenario:
 - FALCON: pb = 0.65, rb = 0.49, pa = 0.52, ra = 0.36, Ja = 0.30
 - Silas: pb = 0.66, rb = 0.47, pa = 0.53, ra = 0.35, Ja = 0.29
- directory (9), food (6), environment (2), conference (6)




OAEI 2008 – anatomy track

- Align
 - Mouse anatomy: 2744 terms
 - NCI-anatomy: 3304 terms
 - Mappings: 1544 (of which 934 ‘trivial’)
- Tasks
 - 1. Align and optimize f
 - 2-3. Align and optimize p / r
 - 4. Align when partial reference alignment is given and optimize f



OAEI 2008 – anatomy track#1

- 9 systems participated
- SAMBO
 - $p=0.869$, $r=0.836$, $r+=0.586$, $f=0.852$
- SAMBOdttf
 - $p=0.831$, $r=0.833$, $r+=0.579$, $f=0.832$
- Use of TermWN and UMLS



OAEI 2008 – anatomy track#1


Is background knowledge (BK) needed?

Of the non-trivial mappings:

- Ca 50% found by systems using BK and systems not using BK
- Ca 13% found only by systems using BK
- Ca 13% found only by systems not using BK
- Ca 25% not found

Processing time:

hours with BK, minutes without BK




OAEI 2008 – anatomy track#4

Can we use given mappings when computing suggestions?

→ partial reference alignment given with all trivial and 50 non-trivial mappings

- SAMBO
 - $p=0.636 \rightarrow 0.660$, $r=0.626 \rightarrow 0.624$, $f=0.631 \rightarrow 0.642$
- SAMBOdtf
 - $p=0.563 \rightarrow 0.603$, $r=0.622 \rightarrow 0.630$, $f=0.591 \rightarrow 0.616$


(measures computed on non-given part of the reference alignment)



OAEI 2007-2008

- Systems can use only one combination of strategies per task
 - systems use similar strategies
 - text: string matching, tf-idf
 - structure: propagation of similarity to ancestors and/or descendants
 - thesaurus (WordNet)
 - domain knowledge important for anatomy task?

Evaluation of algorithms

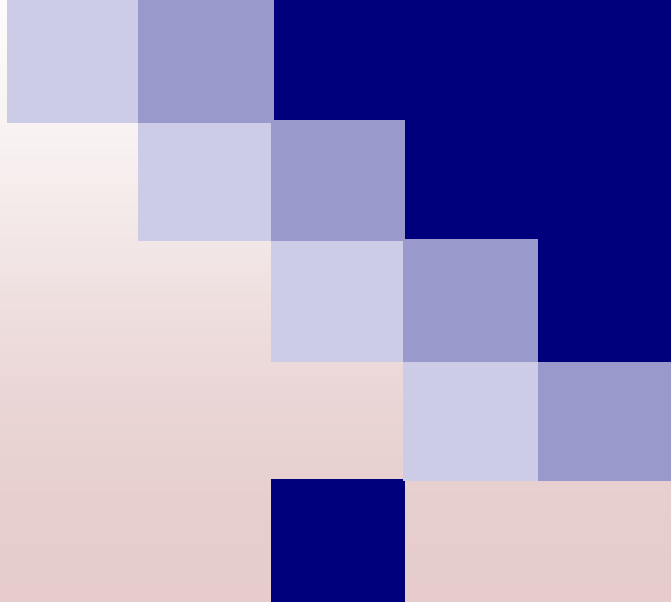




Cases

□ GO vs. SigO

<i>GO: 70 terms</i>	<i>SigO: 15 terms</i>
GO-immune defense	SigO-immune defense
	<i>GO: 60 terms</i>
	GO-behavior
	<i>SigO: 10 terms</i>
	SigO-behavior

□ MA vs. MeSH

<i>MA: 15 terms</i>	<i>MeSH: 18 terms</i>
MA-nose	MeSH-nose
	<i>MA: 77 terms</i>
	MA-ear
	<i>MeSH: 39 terms</i>
	MeSH-ear
<i>MA: 112 terms</i>	<i>MeSH: 45 terms</i>
MA-eye	MeSH-eye



Evaluation of matchers

- **Matchers**

Term, TermWN, Dom, Learn (Learn+structure), Struc

- **Parameters**

Quality of suggestions: precision/recall

Threshold filtering : 0.4, 0.5, 0.6, 0.7, 0.8



Weights for combination: 1.0/1.2

KitAMO

(<http://www.ida.liu.se/labs/iislab/projects/KitAMO>)



Results

- Terminological matchers

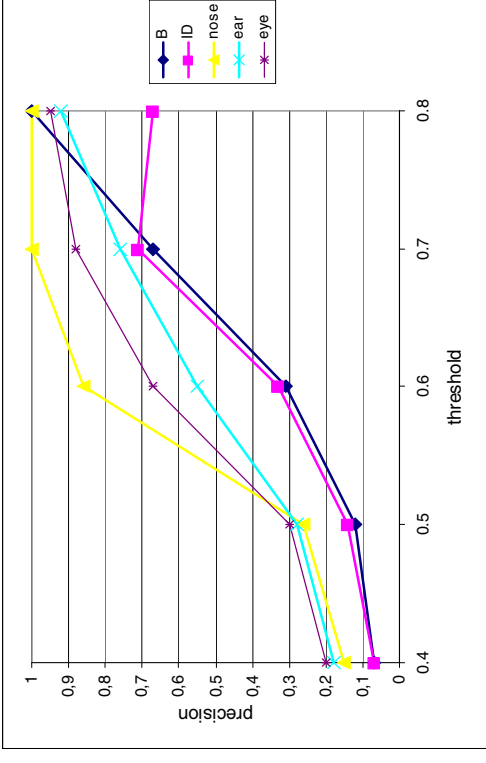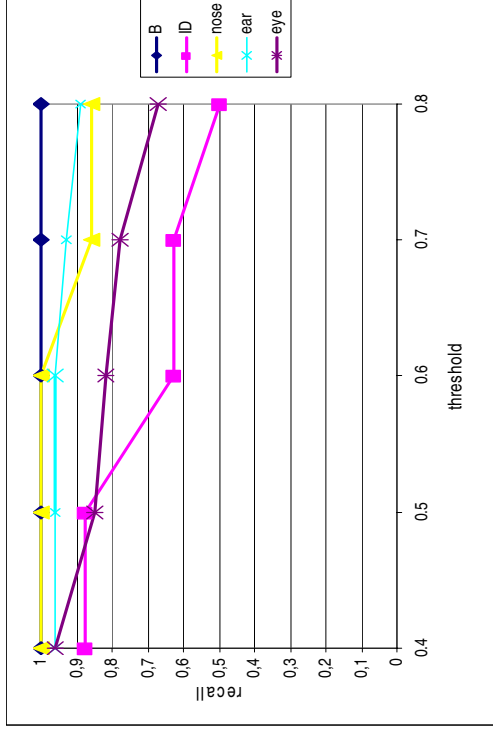

Results

- Basic learning matcher (Naïve Bayes)

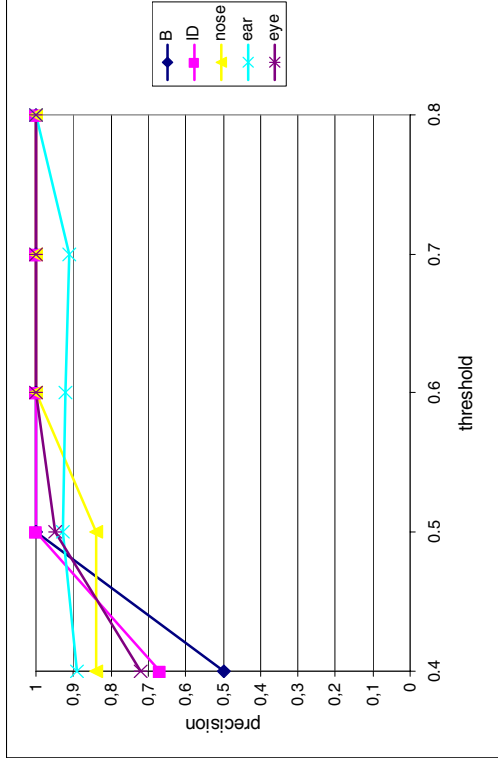
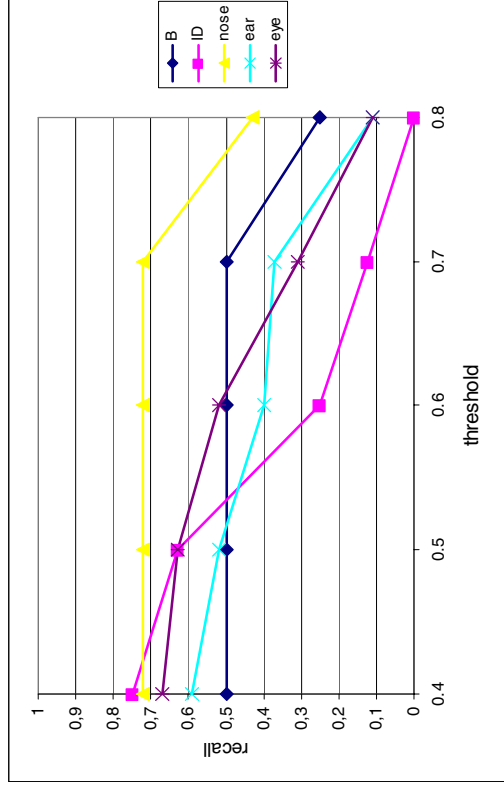


Naive Bayes slightly better recall, but slightly worse precision than SVM-single

SVM-multiple (much) better recall, but worse precision than SVM-single

Results

- Domain matcher (using UMLS)

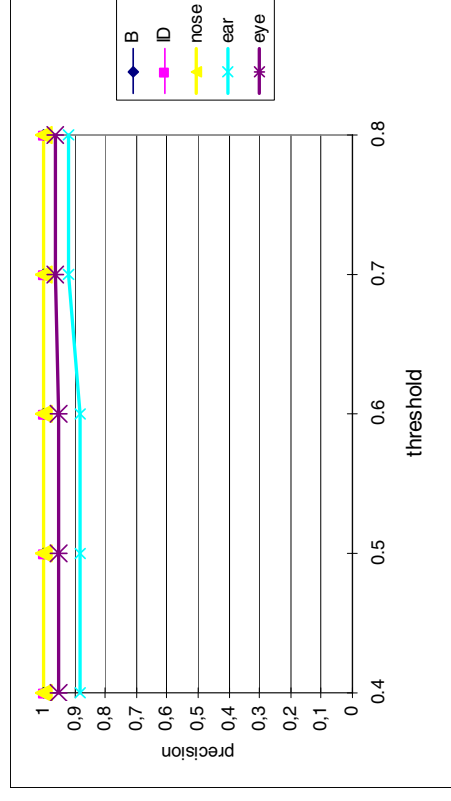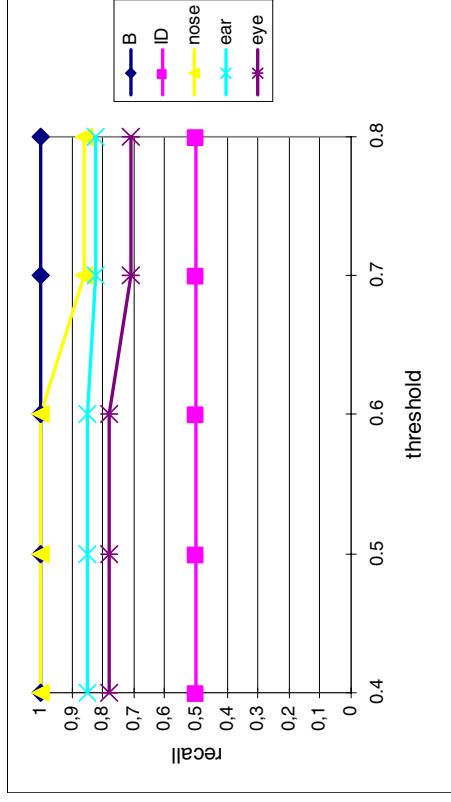




Results

- Comparison of the matchers

$$CS_TermWN \supseteq CS_Dom \supseteq CS_Learn$$

- Combinations of the different matchers
 - combinations give often better results
 - no significant difference on the quality of suggestions for different weight assignments in the combinations
(but: did not check yet for large variations for the weights)
- Structural matcher did not find (many) new correct alignments
(but: good results for systems biology schemas SBML – PSI MI)



Evaluation of filtering

- **Matcher**

TermWN

- **Parameters**


Quality of suggestions: precision/recall

Double threshold filtering using structure:

Upper threshold: 0.8


Lower threshold: 0.4, 0.5, 0.6, 0.7, 0.8

Results

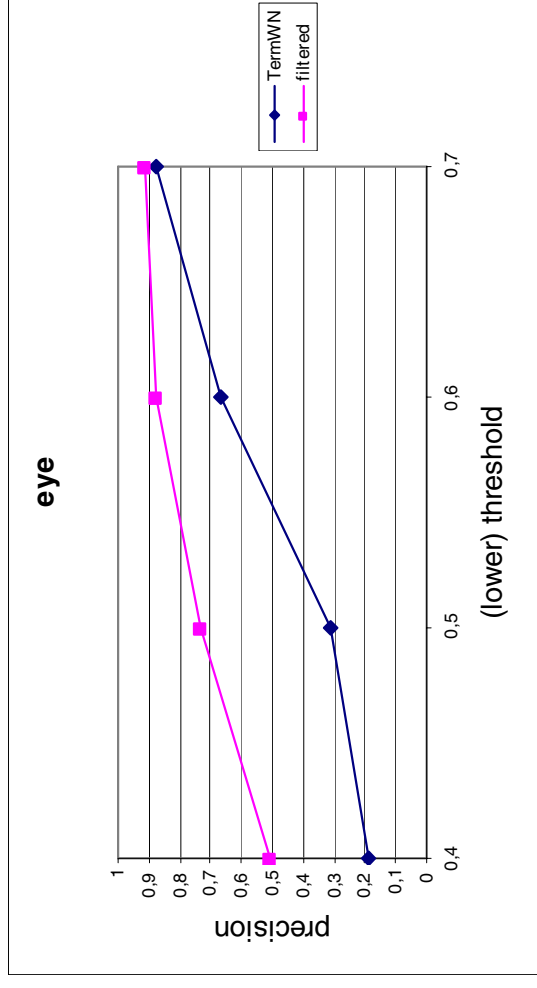


- The precision for double threshold filtering with upper threshold 0.8 and lower threshold T is higher than for threshold filtering with threshold T

Results

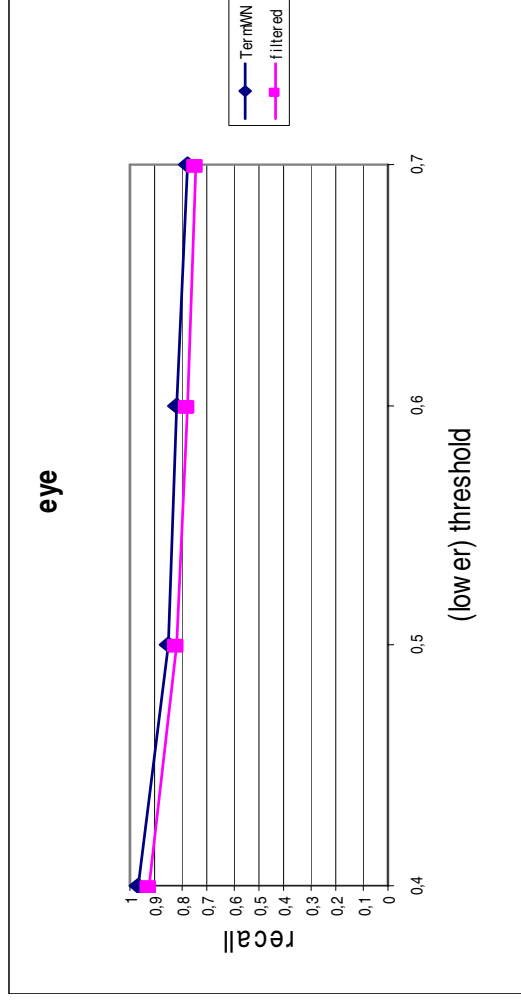


- The recall for double threshold filtering with upper threshold 0.8 and lower threshold T is about the same as for threshold filtering with threshold T



Ontology Alignment


- Ontology alignment
- Ontology alignment strategies
- Evaluation of ontology alignment strategies
- Recommending ontology alignment strategies
- Using PRA in ontology alignment
- Current issues



Recommending strategies - 1

- Use knowledge about previous use of alignment strategies
 - gather knowledge about input, output, use, performance, cost via questionnaires
 - Not so much knowledge available
 - OAEI


(Mochol, Jentzsch, Euzenat 2006)



Recommending strategies - 2

- Optimize
 - Parameters for ontologies, similarity assessment, matchers, combinations and filters
 - Run general alignment algorithm
 - User validates the alignment result
 - Optimize parameters based on validation

(Ehrig, Staab, Sure 2005)



Recommending strategies - 2

■ Tests

□ travel in russia

QOM: $r=0.618$, $p=0.596$, $f=0.607$


Decision tree 150: $r=0.723$, $p=0.591$, $f=0.650$

□ bibster

QOM: $r=0.279$, $p=0.397$, $f=0.328$

Decision tree 150: $r=0.630$, $p=0.375$, $f=0.470$

Decision trees better than Neural Nets and Support Vector Machines.



Recommending strategies - 3

- Based on inherent knowledge
 - Use the actual ontologies to align to find good candidate alignment strategies
 - User/oracle with minimal alignment work
- Complementary to the other approaches


(Tan, Lambrix 2007)



Idea

- Select small segments of the ontologies
- Generate alignments for the segments (expert/oracle)
- Use and evaluate available alignment algorithms on the segments
- Recommend alignment algorithm based on evaluation on the segments

Framework

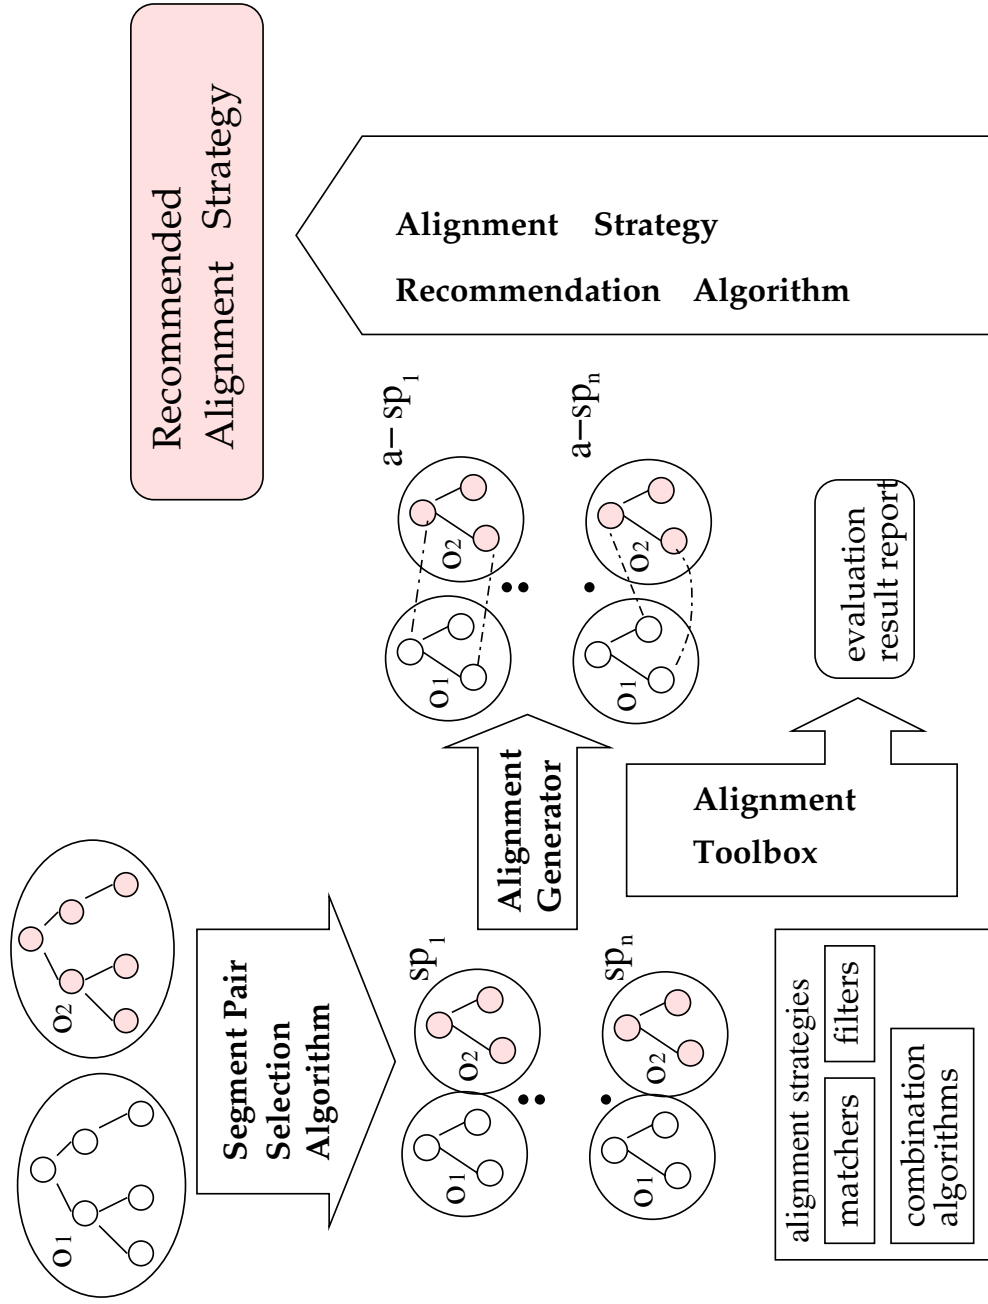

Experiment case

- Ontologies


- NCI thesaurus

- National Cancer Institute, Center for Bioinformatics

- Anatomy: 3495 terms

- MeSH

- National Library of Medicine
- Anatomy: 1391 terms

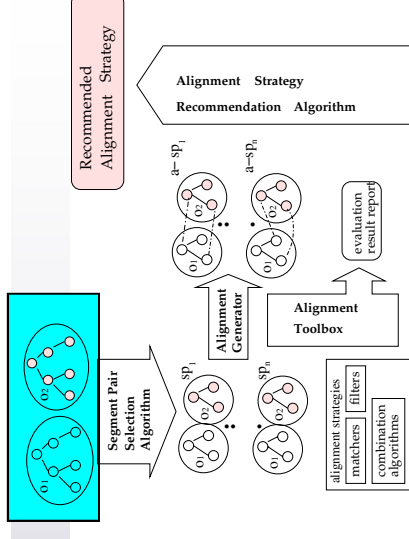



Experiment case - Oracle


- UMLS
 - Library of Medicine
 - Metathesaurus contains > 100 vocabularies
 - NCI thesaurus and MeSH included in UMLS
 - Used as approximation for expert knowledge
 - 919 expected mappings according to UMLS

Experiment case

– alignment strategies


■ Matchers and combinations

- N-gram (NG)
- Edit Distance (ED)
- Word List + stemming (WL)
- Word List + stemming + WordNet (WN)
- NG+ED+WL, weights 1/3 (C1)
- NG+ED+WN, weights 1/3 (C2)
- Threshold filter
 - thresholds 0.4, 0.5, 0.6, 0.7, 0.8


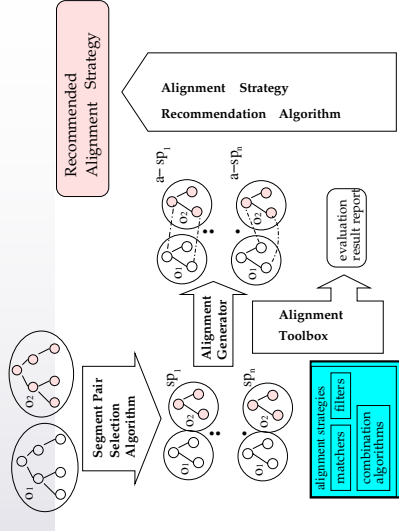


Segment pair selection algorithms

■ SubG

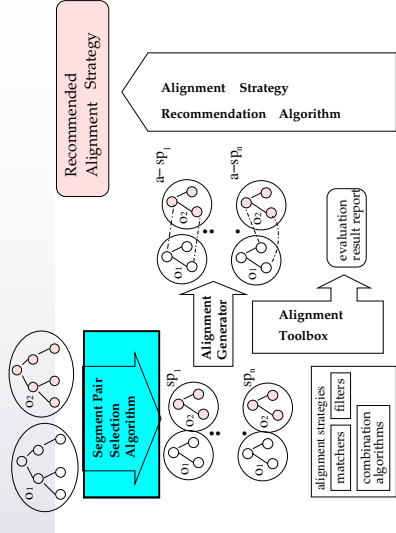




- Candidate segment pair = sub-graphs according to is-a/part-of with roots with same name; between 1 and 60 terms in segment
- Segment pairs randomly chosen from candidate segment pairs such that segment pairs are disjoint

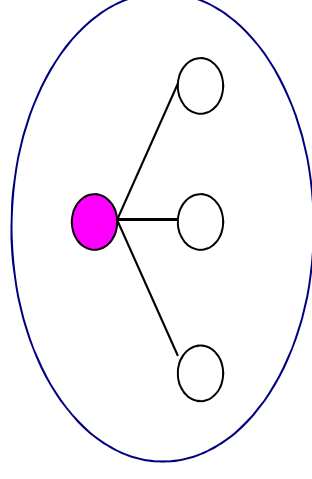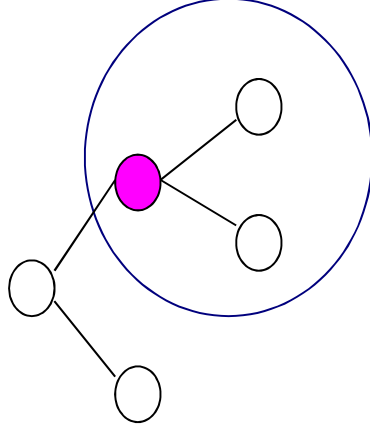


Segment pair selection algorithms

■ Clust - Cluster terms in ontology

- Candidate segment pair is pair of clusters containing terms with the same name; at least 5 terms in clusters
- Segment pairs randomly chosen from candidate segment pairs

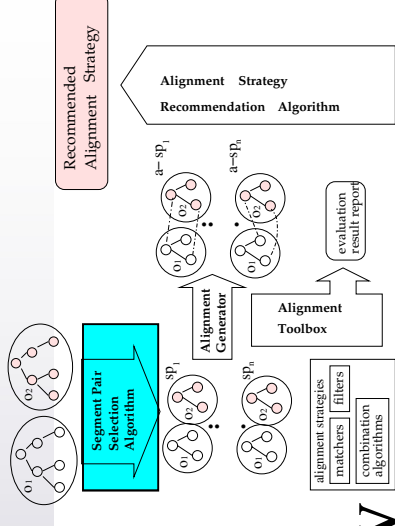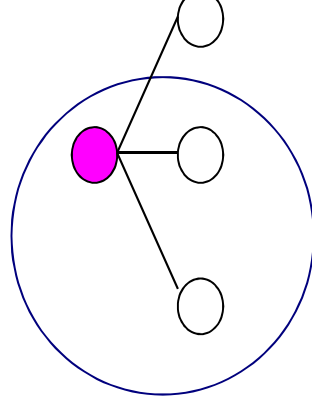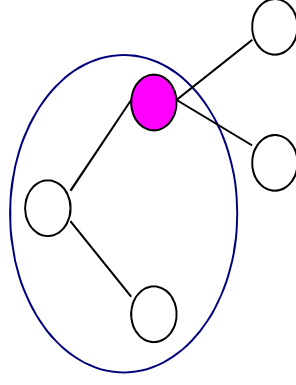




Segment pair selection algorithms

- For each trial, 3 segment pair sets with 5 segment pairs were generated
- SubG: A1, A2, A3
 - 2 to 34 terms in segment
 - level of is-a/part-of ranges from 2 to 6
 - max expected alignments in segment pair is 23
- Clust: B1, B2, B3
 - 5 to 14 terms in segment
 - level of is-a/part-of is 2 or 3
 - max expected alignments in segment pair is 4


Segment pair alignment generator

- Used UMLS as oracle

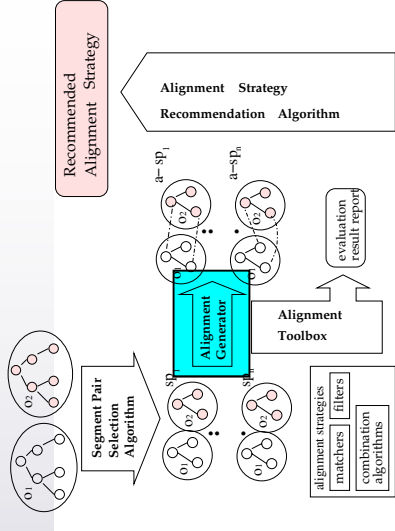


Alignment toolbox

- Used KitAMO as toolbox
- Generates reports on similarity values produced by different matchers, execution times, number of correct, wrong, redundant suggestions

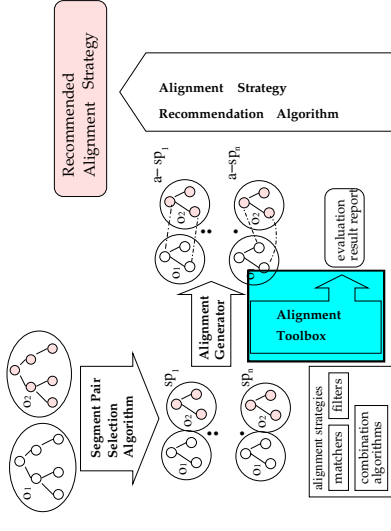

Recommendation algorithm

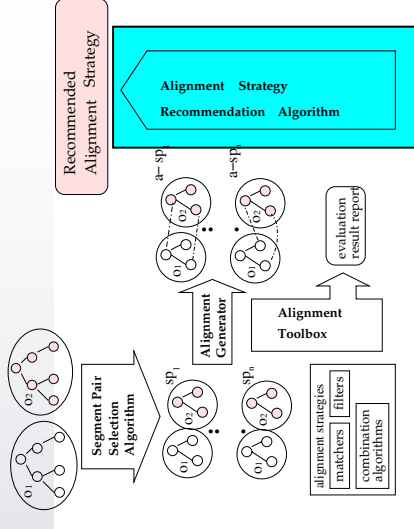


- Recommendation scores: F, F+E, 10F+E

F: quality of the alignment suggestions

- average f-measure value for the segment pairs

E: average execution time over segment pairs,
normalized with respect to number of term pairs


- Algorithm gives ranking of alignment strategies
based on recommendation scores on segment pairs



Expected recommendations for F

- Best strategies for the whole ontologies and measure F:


1. (WL,0.8)
2. (C1,0.8)
3. (C2,0.8)



Results

SubG, F, SPS A1

SPS A1

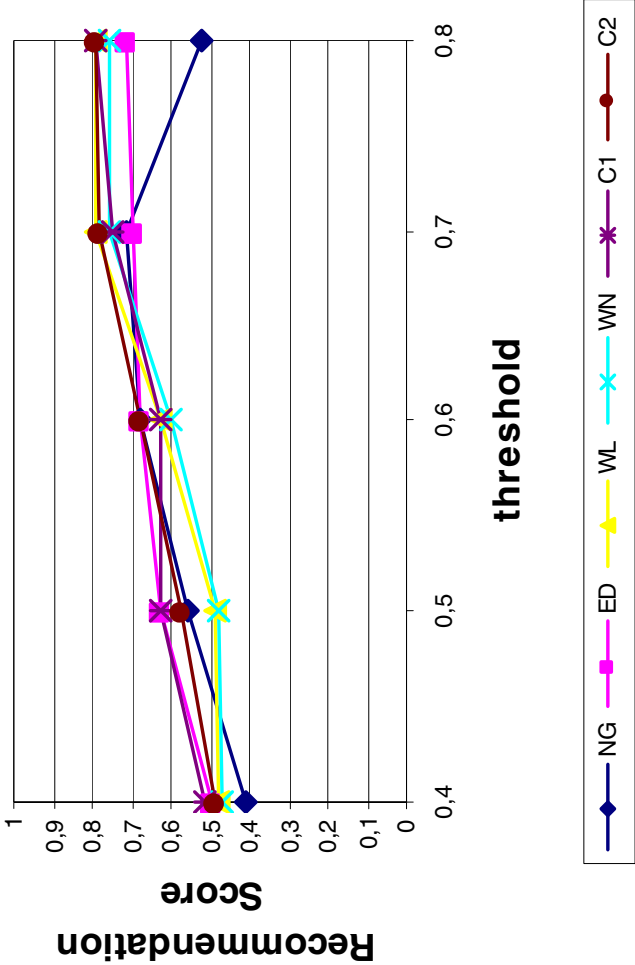



Results

- Top 3 strategies for SubG and measure F:
A1: 1. (WL,0.8) (WL, 0.7) (C1,0.8) (C2,0.8)
A2: 1. (WL,0.8) 2. (WL,0.7) 3. (WN,0.7)
A3: 1. (WL,0.8) (WL, 0.7) (C1,0.8) (C2,0.8)
- Best strategy always recommended first
- Top 3 strategies often recommended
- (WL,0.7) has rank 4 for whole ontologies




Results

- Top 3 strategies for Clust and measure F:
B1: 1. (C2,0.7) 2. (ED,0.6) 3. (C2,0.6)
B2: 1. (WL,0.8) (WL, 0.7) (C1,0.8) (C2,0.8)
B3: 1. (C1,0.8) (ED,0.7) 3. (C1,0.7) (C2,0.7) (WL,0.7)
(WN,0.7)
- Top strategies often recommended, but not always
- (WL,0.7) (C1,0.7) (C2,0.7) ranked 4,5,6 for whole ontologies



Results


- SubG gives better results than Clust
- Results improve when number of segments is increased
- 10F+E similar results as F
- F+E
 - WordNet gives lower ranking
 - Runtime environment has influence




Ontology Alignment

- Ontology alignment
- Ontology alignment strategies
- Evaluation of ontology alignment strategies
- Recommending ontology alignment strategies
- Using PRA in ontology alignment
- Current issues

Ontology Alignment Framework

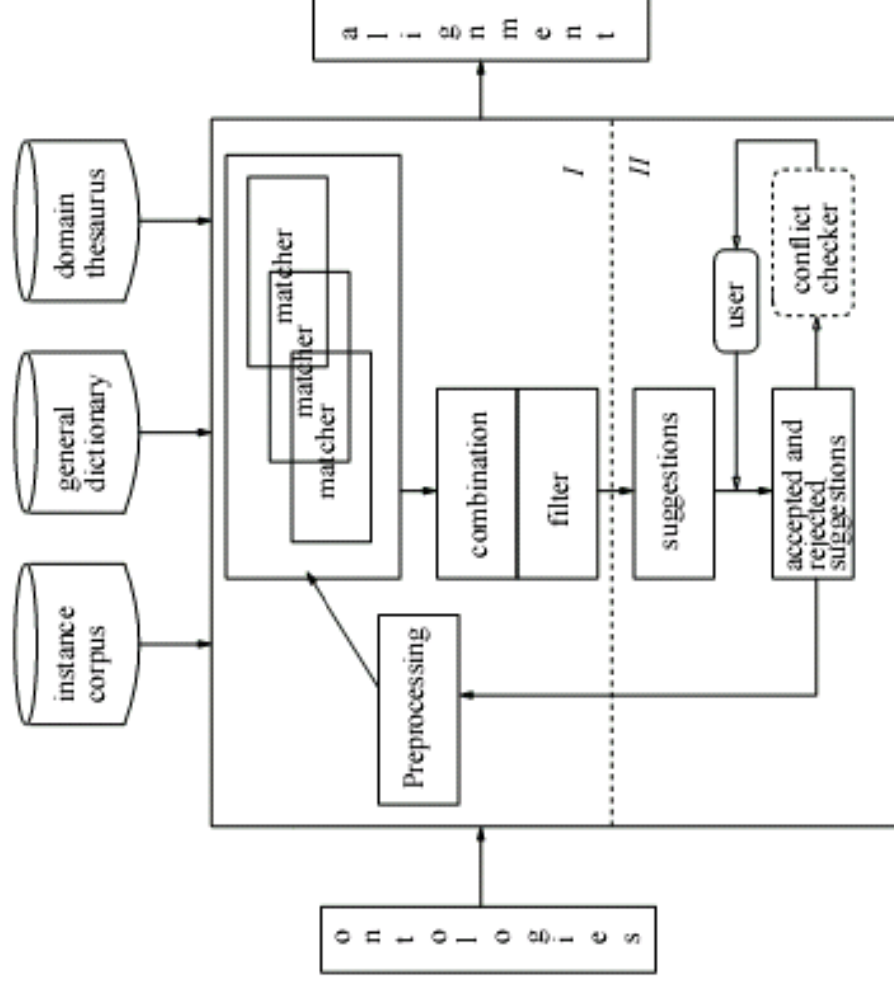




Partial Reference Alignment

- New setting for ontology alignment:
 - Portals with mappings
 - Iterative ontology alignment
 - Anatomy track, task 4 in OAEI 2008
- In all these cases some correct mappings between terms in different ontologies are given or have been obtained.
- A partial reference alignment (PRA) is a subset of all correct mappings.

Partial Reference Alignment

- Research Problem:


Can we use PRAs to obtain higher quality mapping suggestions in ontology alignment?

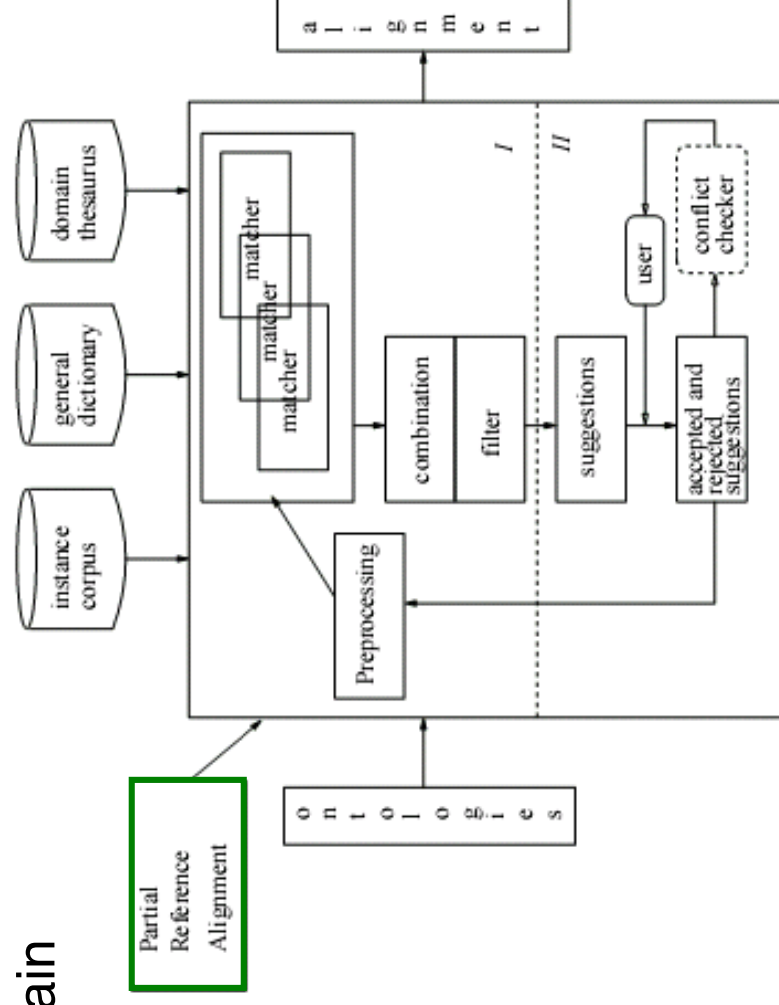

Partial Reference Alignment

- Research Problem:

Can we use PRAs in the different parts of the framework to obtain higher quality mapping suggestions in ontology alignment?

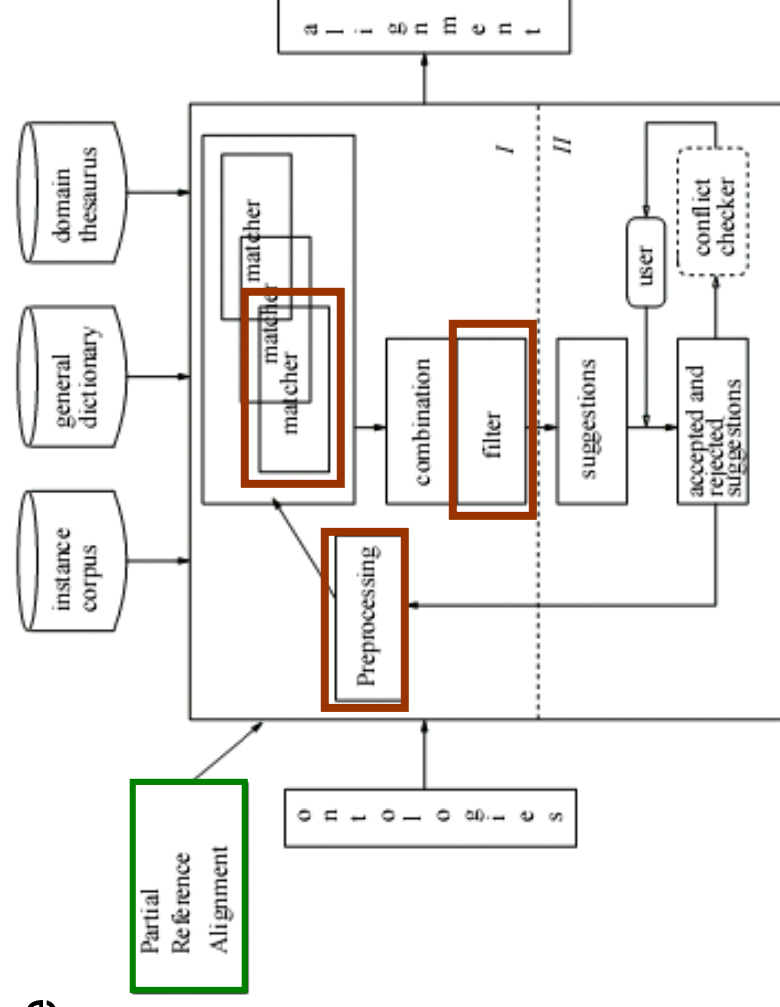

Test cases


DataSet	Concepts in Ontology 1	Concepts in Ontology 2	Mappings in RA	Mappings in PRA
Behavior	57	10	4	2
Defense	69	17	8	4
Nose	18	15	7	4
Ear	78	39	27	14
Eye	113	45	27	13
Anatomy	2743	3304	1523	988

- Behavior, Defense: Gene Ontology – Signal Ontology
- Nose, Ear, Eye: Adult Mouse Anatomy - MeSH
- Anatomy: Adult Mouse Anatomy – NCI anatomy



Evaluation


- *Precision*: number of correct suggestions divided by number of suggestions
- *Recall*: number of correct suggestions divided by number of correct mappings
- *Recall-PRA*: number of correct suggestions not in PRA divided by number of correct mappings not in PRA
- *F-measure*: harmonic mean of precision and recall




Algorithms

Table 1. Alignment strategies

	preprocessing	matchers	combination	filter
SAMBO	none	TermWN + UMLSKSearch	maximum	single threshold
SAMBOdtf	none	TermWN + UMLSKSearch	maximum	double threshold
mgPRA	partitioning	TermWN + UMLSKSearch	maximum	single threshold filter with PRA
mgfPRA	fixing and partitioning	TermWN + UMLSKSearch	maximum	single threshold filter with PRA
pmPRA	none	TermWN + UMLSKSearch pattern-based augmentation	maximum	single threshold filter with PRA
fpPRA	none	TermWN + UMLSKSearch	maximum	single threshold filter with PRA
dtfPRA	none	TermWN + UMLSKSearch	maximum	double threshold with PRA filter with PRA
pfPRA	none	TermWN + UMLSKSearch	maximum	filter based on EM and PRA filter with PRA

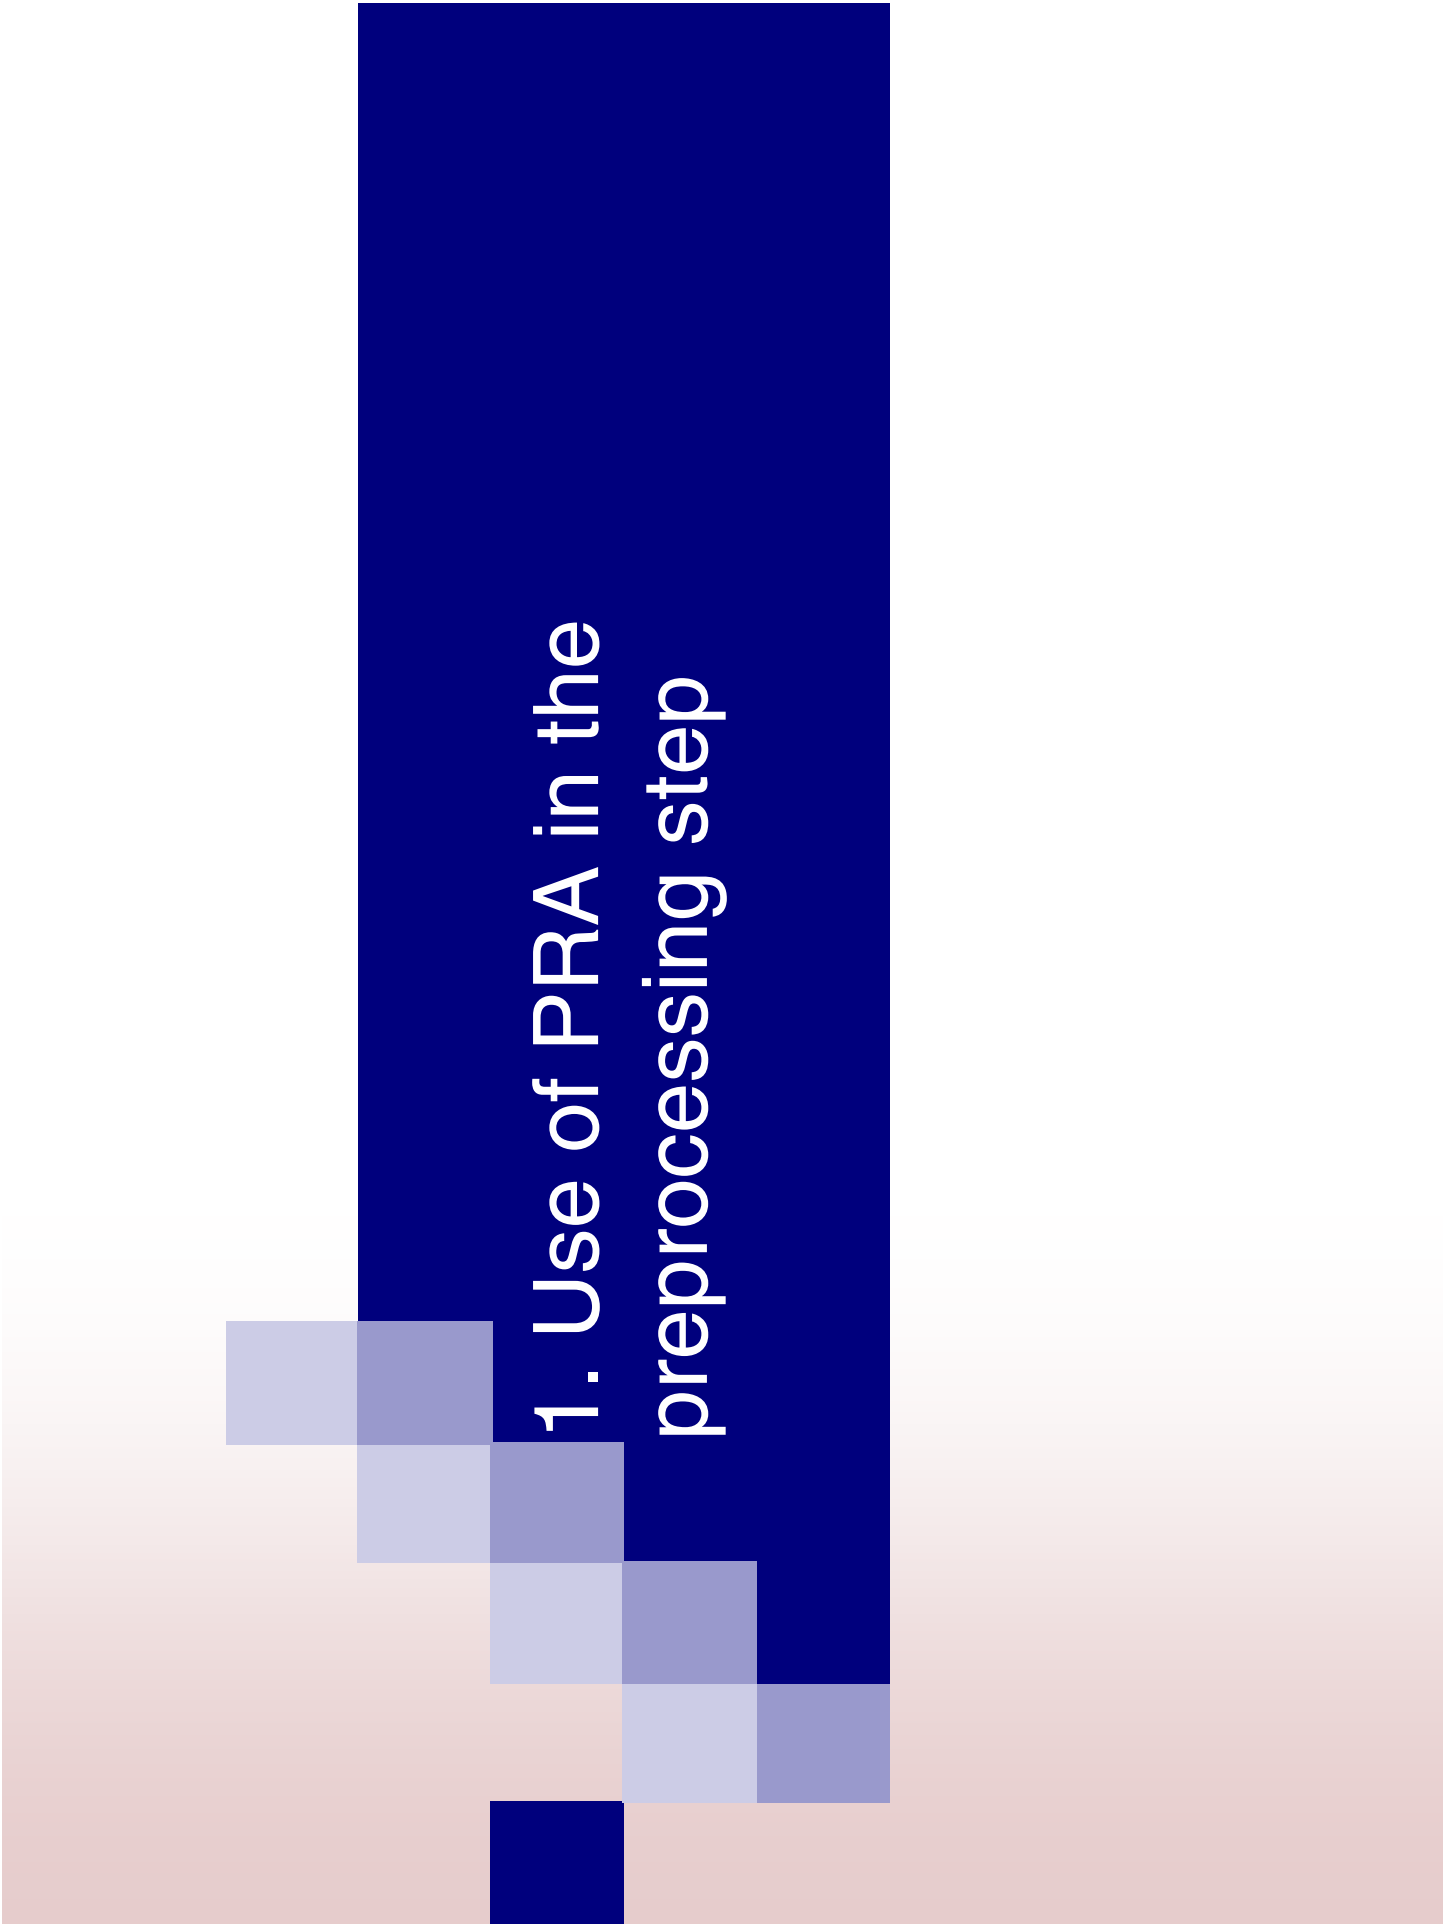

1. Use of PRA in the preprocessing step



Use of PRA in the preprocessing step

- Intuition


During the preprocessing step, use mappings in PRA to partition the ontologies into mappable groups.

- Methods

- mgPRA
- mgfPRA

Use of PRA in the preprocessing step

- mgPRA (Mappable Groups with PRA)
 - Strategy
 - Find consistent group in PRA
 - Partition ontologies into mappable groups before aligning
 - Example:

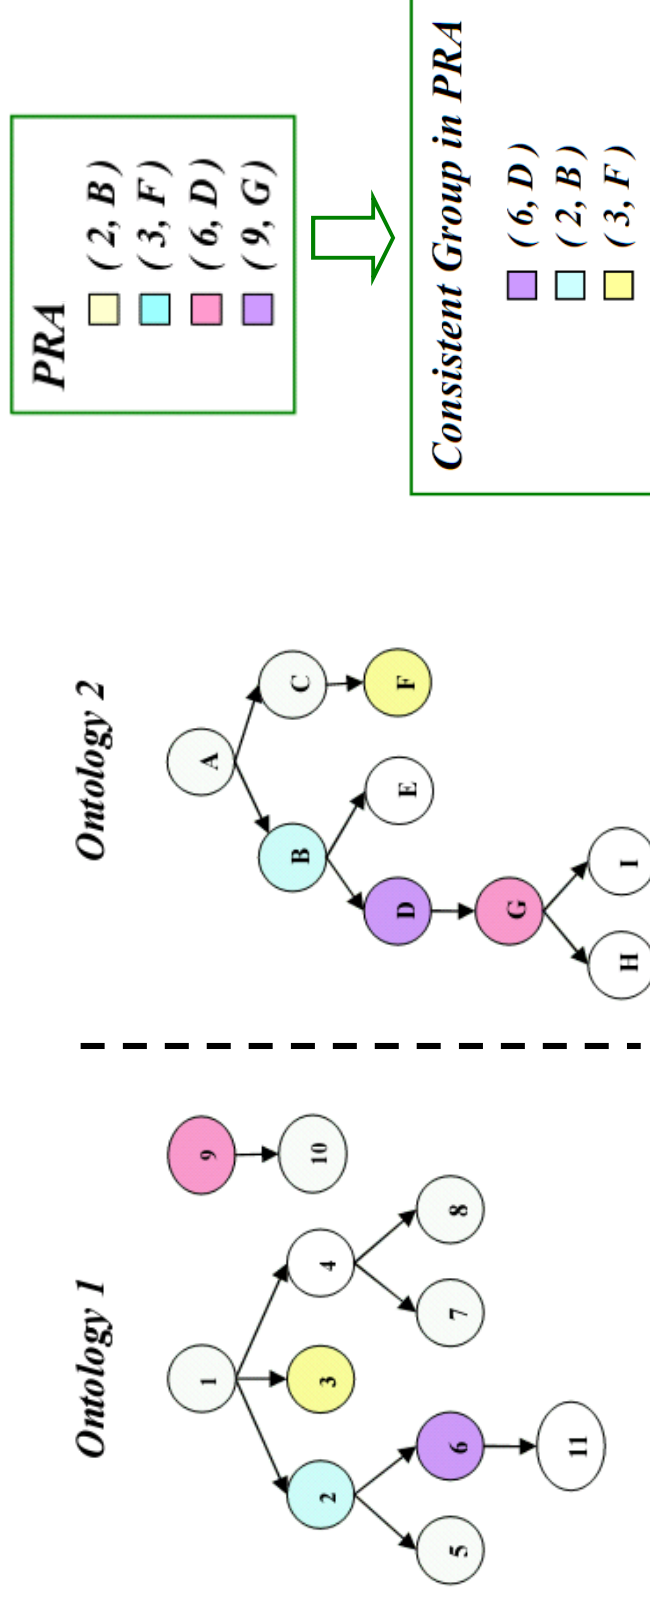


Use of PRA in the preprocessing step

□ Partition Results


Consistent Group in PRA

- (6, D)
- (2, B)
- (3, F)

Ontology 1

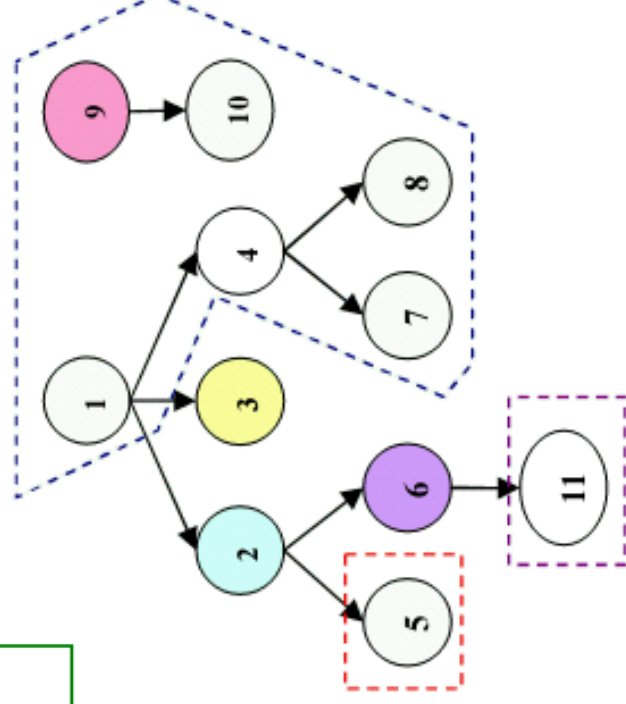


Ontology 2

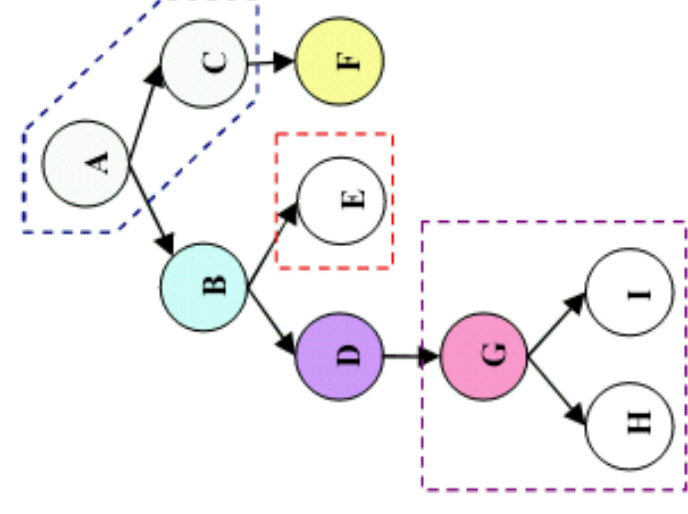


Use of PRA in the preprocessing step


- mgfPRA (Mappable Groups and Fixing with PRA)
 - Strategy
 - ‘Fix’ the missing structural relationships, making the whole PRA a consistent group
 - Then, partition ontologies into mappable groups
 - Example:

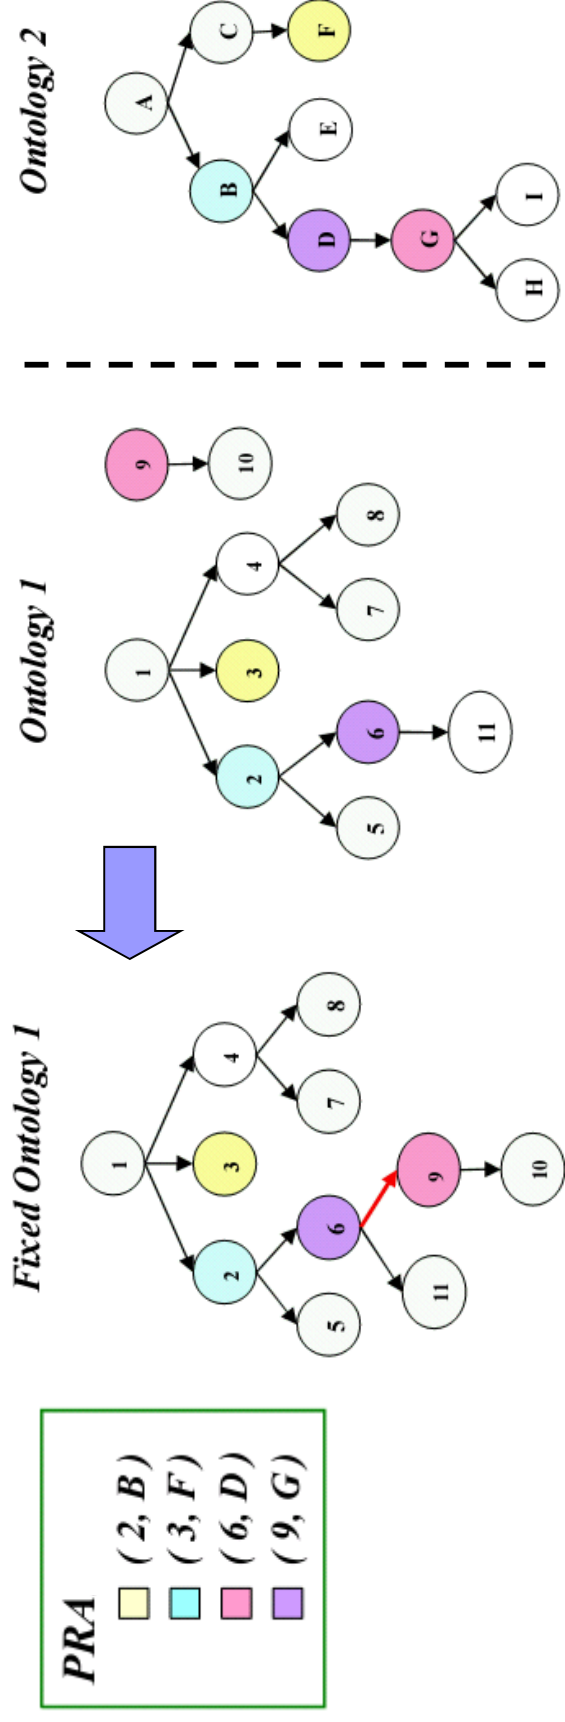

Use of PRA in the preprocessing step

□ Partition Results

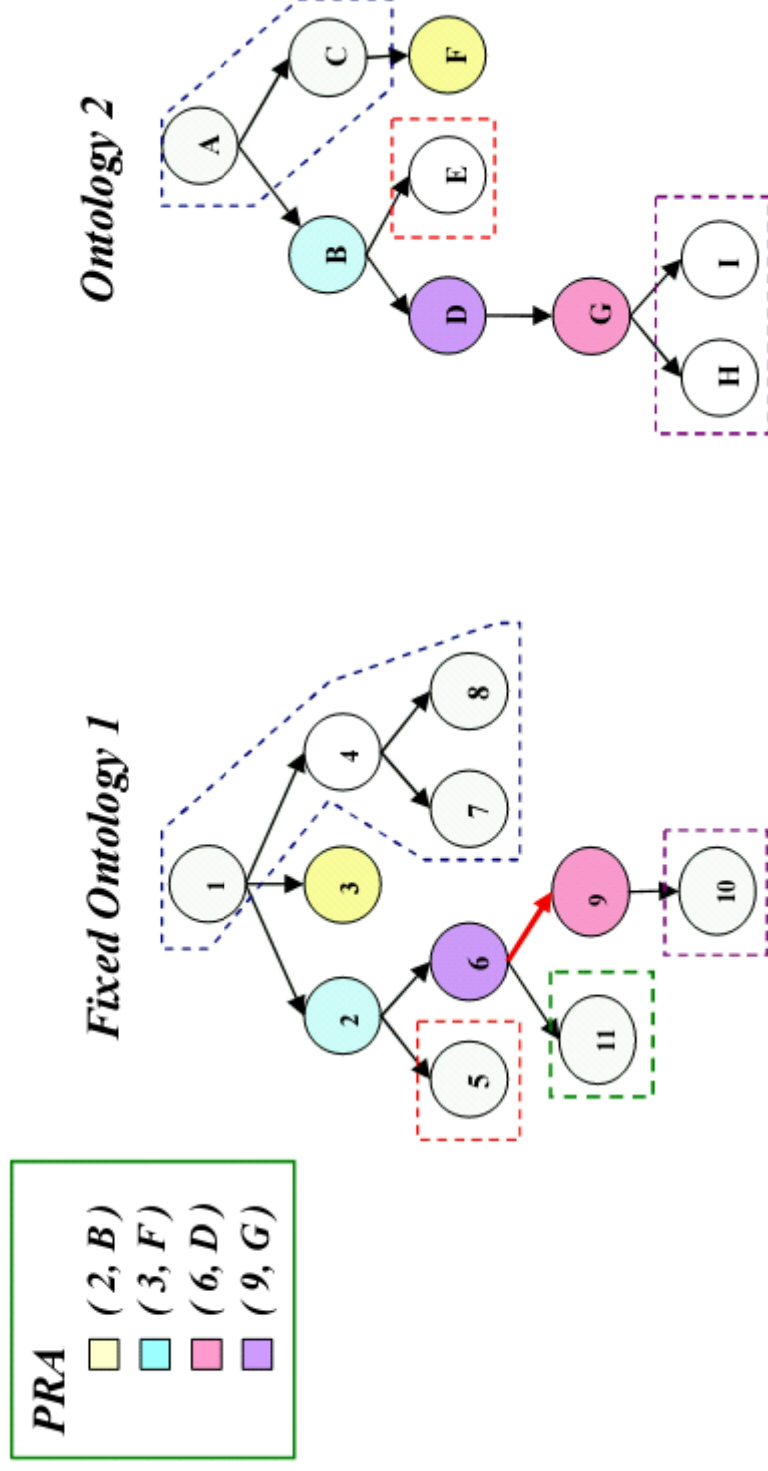



Use of PRA in the preprocessing step

Case	RA	PRA	Th	SAMBO	mgPRA	mgfPRA
B	4	2	0.4	0.66/1/0.8/1	0.66/1/0.8/1	1/0.5/0.66/0
			0.6	0.8/1/0.88/1	0.8/1/0.88/1	1/0.5/0.66/0
			0.8	1/1/1/1	1/1/1/1	1/0.5/0.66/0
ID	8	4	0.4	0.5/0.75/0.6/0.75	0.41/0.62/0.5/0.25	0.41/0.62/0.5/0.25
			0.6	0.75/0.75/0.75/0.75	1/0.62/0.76/0.25	1/0.62/0.76/0.25
			0.8	0.71/0.62/0.66/0.62	1/0.62/0.76/0.25	1/0.62/0.76/0.25
nose	7	4	0.4	1/1/1/1	1/1/1/1	1/0.57/0.72/0
			0.6	1/1/1/1	1/1/1/1	1/0.57/0.72/0
			0.8	1/1/1/1	1/1/1/1	1/0.57/0.72/0
ear	27	14	0.4	0.86/0.96/0.91/0.96	0.85/0.88/0.87/0.76	1/0.66/0.8/0.30
			0.6	0.89/0.96/0.92/0.96	0.88/0.88/0.88/0.76	1/0.66/0.8/0.30
			0.8	0.96/0.92/0.94/0.92	1/0.88/0.94/0.76	1/0.66/0.8/0.30
eye	27	13	0.4	0.80/0.92/0.86/0.92	0.8/0.88/0.84/0.78	1/0.48/0.65/0
			0.6	0.92/0.88/0.90/0.88	0.92/0.88/0.90/0.78	1/0.48/0.65/0
			0.8	0.91/0.81/0.86/0.81	0.92/0.85/0.88/0.71	1/0.48/0.65/0
Anatomy	1523	988	0.4	0.82/0.85/0.83/0.85	0.78/0.87/0.82/0.64	0.78/0.85/0.81/0.58
			0.6	0.88/0.84/0.86/0.84	0.88/0.86/0.87/0.61	0.88/0.84/0.86/0.55
			0.8	0.94/0.80/0.87/0.80	0.96/0.82/0.89/0.50	0.96/0.80/0.88/0.45

Table 3. Using the PRA in the preprocessing phase (precision/recall/f-measure/recall $_{PRA}$).



Use of PRA in the preprocessing step

- Result Analysis
 - For threshold 0.4, there are no conclusive results.
 - For thresholds 0.6 and 0.8,
 - mgPRA and mgfPRA almost always have equal or higher precision than SAMBO.
 - mgPRA almost always has equal or higher recall than SAMBO.
 - mgfPRA almost always has equal or lower recall than SAMBO and mgPRA.



Use of PRA in the preprocessing step

- Why does mgfPRA perform worse than mgPRA?

Incorrect use of the structural relation.

For instance, in dataset **nose**, one source ontology uses the structural relation to define both is-a and part-of.

‘Fixing’ the ontology may therefore be wrong.

For instance, the mapping (nose, nose) may lead to introducing is-a relations between nose and its parts.

2. Use of PRA in the matcher


Use of PRA in a matcher

■ Observation

Some correct mappings share a similar linguistic pattern.

Examples from PRA of Anatomy

- (*lumbar vertebra 5*, *l5 vertebra*) and (*thoracic vertebra 11*, *t11 vertebra*)
- (*forebrain*, *fore brain*) and (*gallbladder*, *gall bladder*)

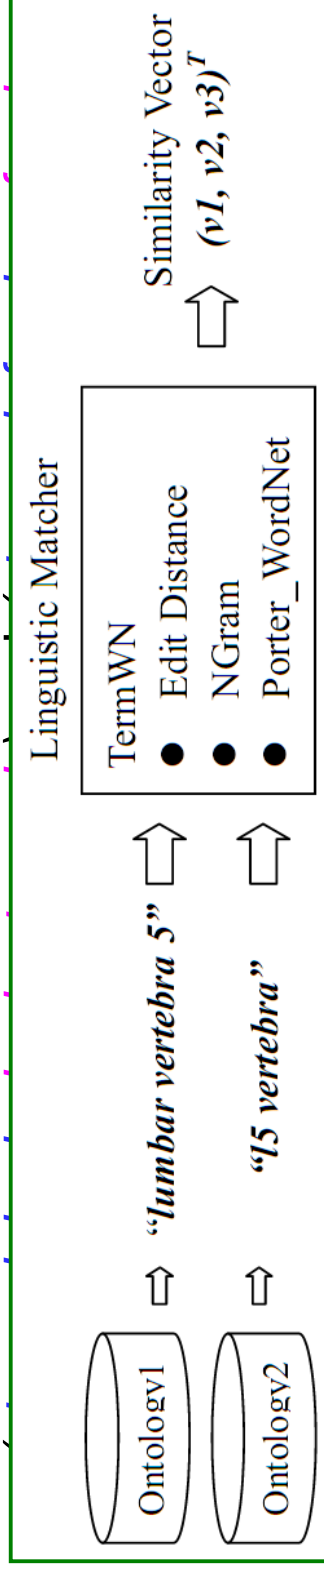

Linguistic similarity vectors for (*lumbar vertebra 5*, *l5 vertebra*) and (*thoracic vertebra 11*, *t11 vertebra*) are similar.



Use of PRA in a matcher

- Intuition

Mapping suggestions with a linguistic similarity vector close to the linguistic similarity vector of a PRA mapping are more likely to be correct suggestions.

- pmPRA (Pattern Matcher with PRA)

- Strategy


- Compute a linguistic similarity vector for each PRA mapping.
 - For each mapping suggestion, we **augment** its similarity value according to the number of PRA mappings within its **neighborhood**.

Use of PRA in a matcher

- For example
 - Given a suggestion **A**, suppose there are 4 PRA mappings within its neighborhood


Parameters

1. Neighborhood Radius = 0.1
2. Augment per count = 0.06



Original Similarity Value: 0.4 $\Rightarrow$

New Similarity Value:
 $0.64 (= 0.4 + 4 * 0.06)$



Use of PRA in a matcher

Case	RA	PRA	Th	SAMBO	pmPRA
B	4	2	0.4	0.66/1/0.8/1	0.66/1/0.8/1
			0.6	0.8/1/0.88/1	0.8/1/0.88/1
			0.8	1/1/1/1	1/1/1/1
ID	8	4	0.4	0.5/0.75/0.6/0.75	0.5/0.75/0.6/0.5
			0.6	0.75/0.75/0.75/0.75	0.75/0.75/0.75/0.5
			0.8	0.71/0.62/0.66/0.62	0.75/0.75/0.75/0.5
nose	7	4	0.4	1/1/1/1	1/1/1/1
			0.6	1/1/1/1	1/1/1/1
			0.8	1/1/1/1	1/1/1/1
ear	27	14	0.4	0.86/0.96/0.91/0.96	0.86/0.96/0.91/0.92
			0.6	0.89/0.96/0.92/0.96	0.89/0.96/0.92/0.92
			0.8	0.96/0.92/0.94/0.92	0.96/0.92/0.94/0.84
eye	27	13	0.4	0.80/0.92/0.86/0.92	0.80/0.92/0.86/0.85
			0.6	0.92/0.88/0.90/0.88	0.89/0.92/0.90/0.85
			0.8	0.91/0.81/0.86/0.81	0.92/0.88/0.90/0.78
Anatomy	1523	988	0.4	0.82/0.85/0.83/0.85	0.78/0.83/0.81/0.54
			0.6	0.88/0.84/0.86/0.84	0.79/0.83/0.81/0.54
			0.8	0.94/0.80/0.87/0.80	0.83/0.83/0.83/0.52

Table 4. Using the PRA in a matcher (precision/recall/f-measure/recall P_{RA}).



Use of PRA in a matcher

- Result Analysis
 - For the small datasets, the correct suggested mappings already had high similarity values, and the missed correct mappings had no shared linguistic pattern with PRA mappings.
 - For the Anatomy dataset, the pmPRA has lower or equal precision. Recall increased for high thresholds and decreased for low thresholds.
 - New correct mappings were found.
 - For low thresholds also new wrong mappings were found.

3. Use of PRA in the filter step



Use of PRA in the filter step


- **fPRA** (Filter with PRA)
 - Strategy
 - Implant PRA mappings in the final result. Any suggestion contradicting with PRA mappings will be filtered out.
- **dtfPRA** (Double Threshold Filter with PRA)
 - Strategy
 - Similar to SAMBOdtf. Use a consistent group in the PRA to filter the suggestions between upper threshold and low threshold.

Use of PRA in the filter step

- pfPRA (Pattern Filter with PRA)

- Strategy


1. Cluster all suggestions according to their linguistic similarity vectors using expectation-maximization algorithm.
2. Assign every **PRA mapping** to the cluster with the nearest cluster center.

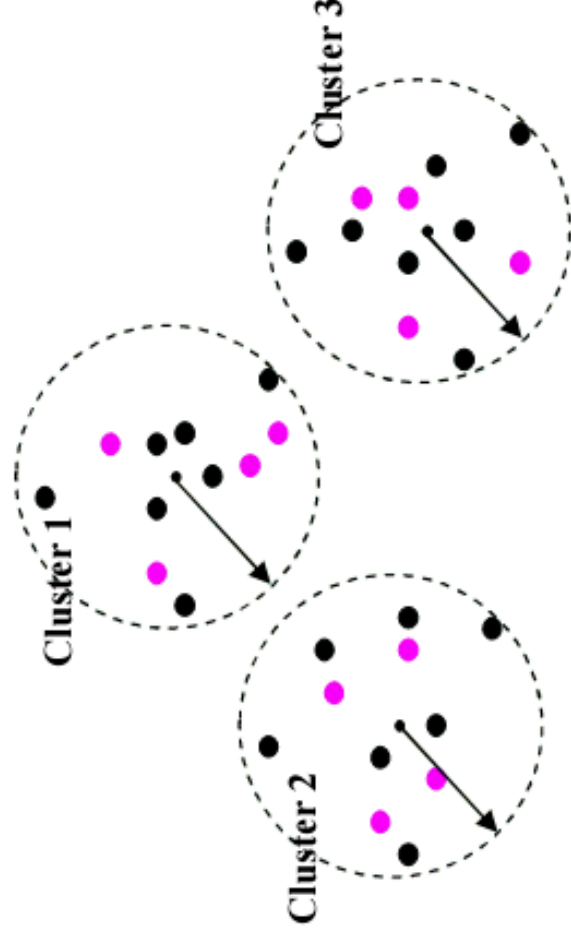


Use of PRA in the filter step

□ Strategy (continued..)

3. For each cluster, calculate the average distance (*AvgDis*) of PRA mappings to their cluster center.
4. Finally, only suggestions with distance to the cluster center smaller or equal than *AvgDis* will be kept. Otherwise, discarded.

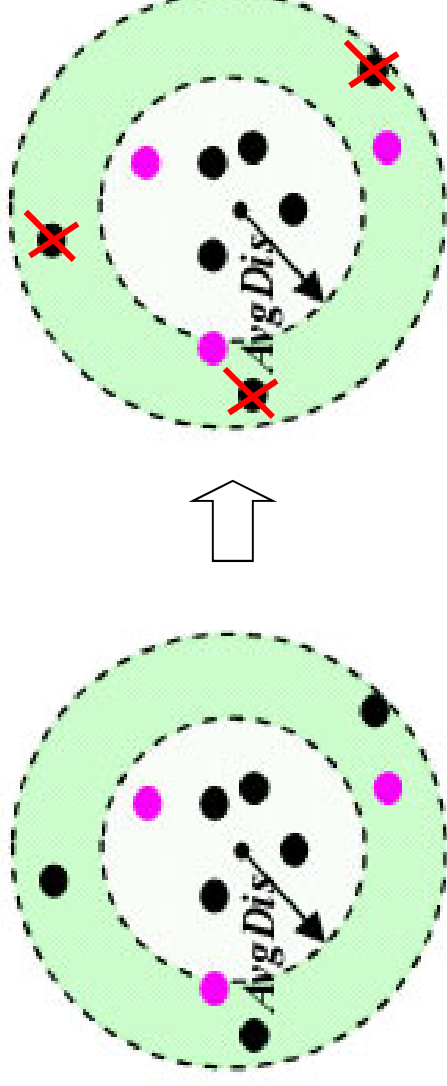



Use of PRA in the filter step (1)


Case	RA	PRA	Th	SAMBO	fPRA	pfPRA
B	4	2	0.4	0.66/1/0.8/1	0.66/1/0.8/1	1/0.75/0.85/0.5
			0.6	0.8/1/0.88/1	0.8/1/0.88/1	1/0.75/0.85/0.5
			0.8	1/1/1/1	1/1/1/1	1/0.75/0.85/0.5
ID	8	4	0.4	0.5/0.75/0.6/0.75	0.5/0.75/0.6/0.5	0.5/0.75/0.6/0.5
			0.6	0.75/0.75/0.75/0.75	0.75/0.75/0.75/0.5	0.75/0.75/0.75/0.5
			0.8	0.71/0.62/0.66/0.62	0.75/0.75/0.75/0.5	0.75/0.75/0.75/0.5
nose	7	4	0.4	1/1/1/1	1/1/1/1	1/0.85/0.92/0.66
			0.6	1/1/1/1	1/1/1/1	1/0.85/0.92/0.66
			0.8	1/1/1/1	1/1/1/1	1/0.85/0.92/0.66
ear	27	14	0.4	0.86/0.96/0.91/0.96	0.86/0.96/0.91/0.92	1/0.92/0.96/0.84
			0.6	0.89/0.96/0.92/0.96	0.89/0.96/0.92/0.92	1/0.92/0.96/0.84
			0.8	0.96/0.92/0.94/0.92	0.96/0.92/0.94/0.84	1/0.88/0.94/0.76
eye	27	13	0.4	0.80/0.92/0.86/0.92	0.80/0.92/0.86/0.85	0.95/0.81/0.88/0.64
			0.6	0.92/0.88/0.90/0.88	0.92/0.92/0.92/0.85	1/0.81/0.89/0.64
			0.8	0.91/0.81/0.86/0.81	0.92/0.88/0.90/0.78	1/0.81/0.89/0.64
Anatomy	1523	988	0.4	0.82/0.85/0.83/0.85	0.83/0.88/0.86/0.66	0.91/0.74/0.82/0.28
			0.6	0.88/0.84/0.86/0.84	0.89/0.87/0.88/0.64	0.93/0.74/0.82/0.27
			0.8	0.94/0.80/0.87/0.80	0.95/0.84/0.89/0.54	0.97/0.72/0.83/0.22

Table 5. Using the PRA during the filter phase - 1 (precision/recall/f-measure/recall_{PRA}).



Use of PRA in the filter step (1)

- Result Analysis
 - fPRA always has equal or higher precision and recall than SAMBO.
 - pfPRA always has equal or higher precision than fPRA and SAMBO.
 - pfPRA always has equal or lower recall than SAMBO.
 - Some correct suggestions are filtered out because they have no similar linguistic pattern to PRA mappings.



Use of PRA in the filter step (2)

Case	RA	PRA	Th	SAMBOdtf	dtfPRA
B	4	2	0.4	0.66/1/0.8/1	1/1/1/1
			0.6	0.8/1/0.88/1	1/1/1/1
ID	8	4	0.4	0.45/0.62/0.52/0.62	0.54/0.75/0.63/0.50
			0.6	0.71/0.62/0.66/0.62	0.75/0.75/0.75/0.50
nose	7	4	0.4	1/1/1/1	1/1/1/1
			0.6	1/1/1/1	1/1/1/1
ear	27	14	0.4	0.89/0.96/0.92/0.96	0.86/0.96/0.91/0.92
			0.6	0.89/0.96/0.92/0.96	0.89/0.96/0.92/0.92
eye	27	13	0.4	0.83/0.92/0.87/0.92	0.80/0.92/0.86/0.85
			0.6	0.92/0.88/0.90/0.88	0.92/0.92/0.92/0.85
Anatomy	1523	988	0.4	0.84/0.84/0.84/0.84	0.86/0.87/0.87/0.65
			0.6	0.89/0.84/0.86/0.84	0.90/0.87/0.88/0.64


Table 6. Using the PRA during the filter phase - 2 (precision/recall/f-measure/recall $_{PRA}$).



Use of PRA in the filter step (2)

- Result Analysis
 - dtfPRA always has equal or higher recall than SAMBOdtf.
 - For lower threshold 0.6, dtfPRA always has equal or higher precision than SAMBOdtf.
 - For lower threshold 0.4, dtfPRA always has equal or higher precision than SAMBOdtf, except for dataset **ear** and **eye**.
 - For dataset **ear** and **eye**, the consistent group of dtfPRA is much smaller than the consistent group of SAMBOdtf.

4. Influence of size of PRA



Use of PRA-Full vs PRA-Half

Strategy	Th	PRA-F	new-F	PRA-H	new-H	NF
mgPRA	0.4	0.78/0.87/0.82	345	0.80/0.85/0.82	351	44
	0.6	0.88/0.86/0.87	327	0.88/0.83/0.85	337	46
	0.8	0.96/0.82/0.89	281	0.95/0.80/0.86	281	50
mgfpPRA	0.4	0.78/0.85/0.81	313	0.79/0.81/0.80	336	85
	0.6	0.88/0.84/0.86	295	0.87/0.80/0.83	321	87
	0.8	0.96/0.80/0.88	243	0.95/0.76/0.84	268	89
pmPRA	0.4	0.78/0.83/0.81	290	0.77/0.83/0.80	313	26
	0.6	0.79/0.83/0.81	290	0.79/0.83/0.81	312	26
	0.8	0.83/0.83/0.83	282	0.84/0.82/0.83	294	28
fpPRA	0.4	0.83/0.88/0.86	356	0.83/0.86/0.84	357	25
	0.6	0.89/0.87/0.88	347	0.88/0.86/0.87	348	26
	0.8	0.95/0.84/0.89	293	0.95/0.82/0.88	294	30
pfPRA	0.4	0.91/0.74/0.82	152	0.90/0.74/0.81	179	32
	0.6	0.93/0.74/0.82	148	0.92/0.74/0.82	175	33
	0.8	0.97/0.72/0.83	118	0.96/0.71/0.82	136	34
dtfpPRA	0.4	0.86/0.87/0.87	350	0.84/0.86/0.85	355	26
	0.6	0.90/0.87/0.88	344	0.89/0.86/0.87	348	26

Table 7. Anatomy (1523 correct mappings in the RA) with PRA-F (988 mappings) and PRA-H (494 mappings) - (precision/recall/f-measure). new-X represents the number of correct mappings not in PRA-F found by using PRA-X. NF is the number of mappings in PRA-F not found by the algorithms using PRA-H.




Use of PRA-Full vs PRA-Half

- Result Analysis


For larger PRA

- For all strategies, the recall is higher.
- For the preprocessing strategies and pmPRA
 - When threshold is low, the precision is lower.
 - When threshold is high, the precision is higher.
- For the filtering strategies
 - The precision is always equal or higher.

Lessons learned

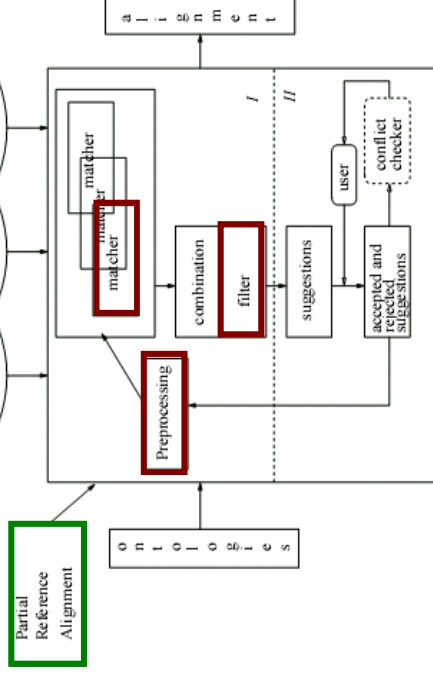


- PRA in preprocessing leads to fewer suggestions, in most cases to an improvement in precision and in some cases to an improvement in recall.
- Use the linguistic pattern matcher mainly to find new suggestions.
- Always use filter with PRA. The other filter approaches work well when the structure of the source ontologies is well-defined and complete.
- Not so large difference between PRA-based algorithms and SAMBO/SAMBOdtf
 - SAMBO/SAMBOdtf already do well on test cases
 - Anatomy case: all new correct mappings are non-trivial




Ontology Alignment

- Ontology alignment
- Ontology alignment strategies
- Evaluation of ontology alignment strategies
- Recommending ontology alignment strategies
- Using PRA in ontology alignment
- **Current Issues**



Current issues

- Systems and algorithms
 - Complex ontologies
 - Use of instance-based techniques
 - Alignment types (equivalence, is-a, ...)
 - Complex mappings (1-n, m-n)
 - Connection ontology types – alignment strategies



Current issues

- Evaluations
 - Need for Golden standards
 - Systems available, but not always the alignment algorithms
 - Evaluation measures
- Recommending 'best' alignment strategies



Further reading

Starting points for further studies



Further reading

ontology alignment

- <http://www.ontologymatching.org>
(plenty of references to articles and systems)
- Ontology alignment evaluation initiative: <http://oaei.ontologymatching.org>
(home page of the initiative)
- Euzenat, Shvaiko, *Ontology Matching*, Springer, 2007.
- Lambrix, Tan, SAMBO – a system for aligning and merging biomedical ontologies, *Journal of Web Semantics*, 4(3):196-206, 2006.
(description of the SAMBO tool and overview of evaluations of different matchers)
- Lambrix, Tan, A tool for evaluating ontology alignment strategies, *Journal on Data Semantics*, VIII:182-202, 2007.
(description of the KitAMO tool for evaluating matchers)



Further reading

ontology alignment

- Chen, Tan, Lambrix, Structure-based filtering for ontology alignment, *IEEE WETICE workshop on semantic technologies in collaborative applications*, 364-369, 2006.
(double threshold filtering technique)
- Tan, Lambrix, A method for recommending ontology alignment strategies, *International Semantic Web Conference*, 494-507, 2007.
Ehrig, Staab, Sure, Bootstrapping ontology alignment methods with APFEL, *International Semantic Web Conference*, 186-200, 2005.
Mochol, Jentzsch, Euzenat, Applying an analytic method for matching approach selection, *International Workshop on Ontology Matching*, 2006.
(recommendation of alignment strategies)
- Lambrix, Liu, Using partial reference alignments to align ontologies, *European Semantic Web Conference*, 188-202, 2009.
(PRA in ontology alignment)



Further reading

ontology alignment

- Lambrix, Strömbäck, Tan, Information integration in bioinformatics with ontologies and standards, chapter 8 in Bry, Maluszynski (eds), *Semantic Techniques for the Web*, Springer, 2009. ISBN: 978-3-642-04580-6.
(largest overview of systems)