



Formal Languages Part 2 Context Free Grammars

Peter Fritzon
IDA, Linköpings universitet, 2009.


Context-Free Grammars



■ Example: an English sentence:
Sentence: **Old Harry jogs**
Constituents: subject predicate
Word Class: adjective noun verb

■ A grammar is used to describe the syntax.

BNF (Backus-Naur form) 1960 (meta-language to describe languages):



- $\langle \text{sentence} \rangle \rightarrow \langle \text{subject} \rangle \langle \text{predicate} \rangle$
- $\langle \text{subject} \rangle \rightarrow \langle \text{adjective} \rangle \langle \text{noun} \rangle$
- $\langle \text{predicate} \rangle \rightarrow \langle \text{verb} \rangle$
- $\langle \text{adjective} \rangle \rightarrow \text{old} \mid \text{big} \mid \text{strong} \mid \dots$
- $\langle \text{noun} \rangle \rightarrow \text{Harry} \mid \text{brother} \mid \dots$
- $\langle \text{verb} \rangle \rightarrow \text{jogs} \mid \text{snores} \mid \text{sleeps} \mid \dots$

TDDD16/B44, P Fritzon, IDA, LIU, 2010

2.2

Grammars, cont.



- $\langle \text{sentence} \rangle$ is a *start symbol*.
- Symbols to the left of " $\rightarrow$ " are called *nonterminals*.
- Symbols not surrounded by " $\langle$ " " $\rangle$ " are *terminals*.
- Each line is a *production*.

Symbol	Meaning
$\langle \dots \rangle$	syntactic classes
$\rightarrow$	"consists of", "is" (also " $::=$ ")
$ $	"or"

TDDD16/B44, P Fritzon, IDA, LIU, 2010

2.3

A Grammar can be used to Produce or Derive Sentences



- Example: $\langle \text{sentence} \rangle \Rightarrow^* \text{Old Harry jogs}$
 - where $\langle \text{sentence} \rangle$ is the start symbol and $\Rightarrow^*$ means derivation in zero or more steps.

Example Derivation:

```

<sentence> => <subject> <predicate>
=> <adjective> <noun> <predicate>
=> Old <noun> <predicate>
=> Old Harry <predicate>
=> Old Harry <verb>
=> Old Harry jogs
  
```

TDDD16/B44, P Fritzon, IDA, LIU, 2010

2.4

Definition: CFG (Context-free grammar)



- A CFG (Context-free grammar) is a quadruple (4 parts):
 $G = \langle N, \Sigma, P, S \rangle$
where
 N : Nonterminals.
 Σ : terminal Symbols.
 P : rules, Productions of the form
 $A \rightarrow a$ where $A \in N$ and
 $a \in (N \cup \Sigma)^*$
 S : the Start symbol,
a nonterminal, $S \in N$.
- Example:
 - 1. $\langle \text{number} \rangle \rightarrow \langle \text{no} \rangle$
 - 2. $\langle \text{no} \rangle \rightarrow \langle \text{no} \rangle \langle \text{digit} \rangle$
 - 3. $\langle \text{digit} \rangle \rightarrow 0 \mid 1 \mid 2 \mid 3 \mid 4 \mid 5 \mid 6 \mid 7 \mid 8 \mid 9$
 - 4. $\langle \text{digit} \rangle \rightarrow 0 \mid 1 \mid 2 \mid 3 \mid 4 \mid 5 \mid 6 \mid 7 \mid 8 \mid 9$
- $N = \{ \langle \text{number} \rangle, \langle \text{no} \rangle, \langle \text{digit} \rangle \}$
- $\Sigma = \{ 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 \}$
- $S = \langle \text{number} \rangle$
- (Sometimes $V = N \cup \Sigma$ is used, called the *vocabulary*.)

TDDD16/B44, P Fritzon, IDA, LIU, 2010

2.5

Notational Conventions



$\alpha, \beta, \gamma \in V^*$	string of terminals and nonterminals
$A, B, C \in N$	nonterminals
$a, b, c \in \Sigma$	terminal symbols
$u, v, w, x, y, z \in \Sigma^*$	string of terminals

TDDD16/B44, P Fritzon, IDA, LIU, 2010

2.6

Derivations



Derivation

- $\alpha \Rightarrow \beta$ (pronounced “ α derives β ”)
- Formally: $\gamma A \theta \Rightarrow \gamma \delta \theta$ if we have $A \rightarrow \delta$
- Example: $\langle \text{number} \rangle \Rightarrow_m \langle \text{no} \rangle \Rightarrow_m \langle \text{no} \rangle \langle \text{digit} \rangle \Rightarrow_m \langle \text{no} \rangle 2 \Rightarrow_m \langle \text{digit} \rangle 2 \Rightarrow_m 12$
- $\langle \text{number} \rangle \Rightarrow \langle \text{no} \rangle$ direct derivation.
- $\langle \text{number} \rangle \Rightarrow^* 12$ several derivations (zero or more).
- $\langle \text{number} \rangle \Rightarrow^+ 12$ several derivations (one or more).

- Given $G = \langle N, \Sigma, P, S \rangle$ the language generated by G can be defined as $L(G)$:

$$L(G) = \{ w \mid S \Rightarrow^+ w \text{ and } w \in \Sigma^* \}$$

TDD16/B44, P Frittsen, IDA, LIU, 2010

2.7

Sentential form, Sentence



Sentential form

- A string α is a *sentential form* in G if
- $S \Rightarrow^* \alpha$ and $\alpha \in V^*$ (string of terminals and/or nonterminals)
- Example: $\langle \text{no} \rangle \langle \text{digit} \rangle$ is a sentential form in $G(\langle \text{number} \rangle)$. $\langle \text{no} \rangle 8$ is another sentential form

Sentence

- w is a *sentence* in G if $S \Rightarrow^+ w$ and $w \in \Sigma^*$.
- Example: 12 is a sentence in $G(\langle \text{number} \rangle)$.

TDD16/B44, P Frittsen, IDA, LIU, 2010

2.8

Left and Right Derivations



Left derivation

- $\Rightarrow_{lm}$ means that we replace the *leftmost* nonterminal by some appropriate right side.

Left sentential form

- A sentential form which is part of a leftmost derivation.

Right derivation (canonical derivation)

- $\Rightarrow_{rm}$ means that we replace the *rightmost* nonterminal by some appropriate right side.

Right sentential form

- A sentential form which is part of a rightmost derivation.

TDD16/B44, P Frittsen, IDA, LIU, 2010

2.9

Rightmost Derivation, Handle



Reverse rightmost derivation

- $12 \leq_m \langle \text{digit} \rangle 2 \leq_m \langle \text{no} \rangle 2 \leq_m \langle \text{no} \rangle \langle \text{digit} \rangle \leq_m \langle \text{no} \rangle \leq_m \langle \text{number} \rangle$

Handles

Consist of two parts:

- 1. A production $A \rightarrow \beta$
- 2. A position
- 3. 1. $\langle \text{number} \rangle \rightarrow \langle \text{no} \rangle$
- 4. $\langle \text{no} \rangle \rightarrow \langle \text{no} \rangle \langle \text{digit} \rangle$
- 5. $\langle \text{digit} \rangle \rightarrow 0|1|2|3|4|5|6|7|8|9$
- 6. If $S \Rightarrow_m^* \alpha A w \Rightarrow_m \alpha \beta w$, the production $A \rightarrow \beta$ together with the position after α is a *handle* of $\alpha \beta w$.

- Example: The handle of $\langle \text{no} \rangle 2$ is the production $\langle \text{digit} \rangle \rightarrow 2$ and the position after $\langle \text{no} \rangle$ because:

- $\langle \text{number} \rangle \Rightarrow_m \langle \text{no} \rangle \Rightarrow_m \langle \text{no} \rangle \langle \text{digit} \rangle \Rightarrow_m \langle \text{no} \rangle 2 \Rightarrow_m \langle \text{digit} \rangle 2 \Rightarrow_m 12$

- Informally: a handle is what we *reduce* to what and where to get the previous sentential form in a rightmost derivation.

TDD16/B44, P Frittsen, IDA, LIU, 2010

2.10

Reduction



Reduction of a grammar rule

In reverse right derivation, find a **right side** in some rule according to the grammar in the given right sentential form and **replace** it with the corresponding **left side**, i.e., nonterminal


TDD16/B44, P Frittsen, IDA, LIU, 2010

2.11

Parse trees (derivation trees)



- A parse tree can correspond to several different derivations.



Example Grammar:

1. $\langle \text{number} \rangle \rightarrow \langle \text{no} \rangle$
2. $\langle \text{no} \rangle \rightarrow \langle \text{no} \rangle \langle \text{digit} \rangle$
3. $\langle \text{digit} \rangle \rightarrow 0|1|2|3|4|5|6|7|8|9$
4. $\langle \text{digit} \rangle \rightarrow 0|1|2|3|4|5|6|7|8|9$

TDD16/B44, P Frittsen, IDA, LIU, 2010


2.12

Ambiguous Grammars

- A grammar G is *ambiguous* if a sentence in G has several different parse trees.

e.g. $E \rightarrow E + E$
 $E \rightarrow E * E$
 $E \rightarrow id$

- $id+id*id$ has two different parse trees.

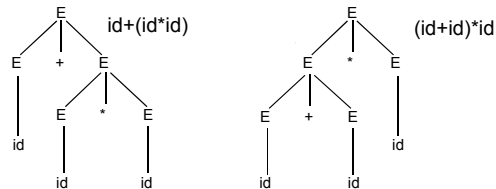

TDD016/B44, P Fritzon, IDA, LIU, 2010

2.13

Rewriting to Unambiguous Grammar

- Rewrite the grammar to make it unambiguous:
 - $+$, $*$ are to have the right priority and
 - $+$, $*$ are to be left associative while
 - $\uparrow$ is to be right associative.
- Example: $a+b+c+d$ is interpreted as $(a+b)+c+d$, using the rewritten grammar:

$E \rightarrow E + T$ (left associative)
 $T \rightarrow T * F$ (left associative)
 $F \rightarrow P \uparrow F$ (right associative)
 $P \rightarrow id$

TDD016/B44, P Fritzon, IDA, LIU, 2010

2.14

Small Parse Tree Exercise

TDD016/B44, P Fritzon, IDA, LIU, 2010


2.15

Example Palindrome Grammars

- Palindrome: a string that is symmetrical around its center
- Example: The following grammar generates $\{a^n b^n \mid n \geq 1\}$.

$S \rightarrow a S b$
 $S \rightarrow a b$

Example parse tree:



Another example:
 Grammar describing binary palindromes of odd lengths ≥ 1 :

$S \rightarrow 0 S 0$
 $S \rightarrow 1 S 1$
 $S \rightarrow 0$
 $S \rightarrow 1$

Example derived strings: 0, 1, 000, 010, 111

TDD016/B44, P Fritzon, IDA, LIU, 2010

2.16

Binary Palindrome Exercise

TDD016/B44, P Fritzon, IDA, LIU, 2010

2.17

Example Excerpt from a Pascal Grammar

$goal \rightarrow \langle progdecl \rangle .$
 $\langle progdecl \rangle \rightarrow \langle prog_hedr \rangle ; \langle block \rangle$
 $\langle prog_hedr \rangle \rightarrow$
 $\quad program \langle idname \rangle (\langle idname_list \rangle)$
 $\quad | \quad program \langle idname \rangle$
 $\langle block \rangle \rightarrow \langle decls \rangle begin$
 $\quad \langle stat_list \rangle end$
 $\langle decls \rangle \rightarrow \langle labels \rangle \langle const \rangle$
 $\quad \langle types \rangle \langle vars \rangle \langle procs \rangle$
 $\langle labels \rangle \rightarrow label \langle label_decl \rangle ;$
 $\quad | \epsilon$
 $\langle label_decl \rangle \rightarrow \langle label_decl \rangle , \langle labelid \rangle$
 $\quad | \langle labelid \rangle$
 $\langle labelid \rangle \rightarrow \langle int \rangle$
 $\quad | \langle id \rangle$
 $\langle const \rangle \rightarrow const \langle const_decls \rangle$
 $\quad | \epsilon$
 $\langle const_decls \rangle \rightarrow \langle const_decls \rangle \langle const_decl_c \rangle$
 $\quad | \langle const_decl_c \rangle$
 $\langle const_decl_c \rangle \rightarrow \langle const_decl \rangle ;$
 $\langle const_decl \rangle \rightarrow \langle idname \rangle = \langle const \rangle$
 $\quad type \langle type_decls \rangle$
 $\quad | \epsilon$
 $\langle type_decls \rangle \rightarrow \langle type_decls \rangle \langle type_decl_c \rangle$
 $\quad | \langle type_decl_c \rangle$
 $\langle type_decl_c \rangle \rightarrow \langle type_decl \rangle ;$
 $\langle type_decl \rangle \rightarrow \langle idname \rangle = \langle type \rangle$
 $\quad var \langle var_decls \rangle$
 $\quad | \epsilon$
 $\langle var_decls \rangle \rightarrow \langle var_decls \rangle \langle var_decl_c \rangle$
 $\quad | \langle var_decl_c \rangle$
 $\langle var_decl_c \rangle \rightarrow \langle var_decl \rangle ;$
 $\langle var_decl \rangle \rightarrow \langle id_list \rangle : \langle type \rangle$
 $\quad \langle proc \rangle$
 $\quad | \epsilon$
 $\langle proc_decls \rangle \rightarrow \langle proc_decls \rangle \langle proc \rangle$
 $\quad | \langle proc \rangle$

TDD016/B44, P Fritzon, IDA, LIU, 2010

2.18

Example

Excerpt from a Pascal Grammar, Cont.



```
<proc> → procedure <phead_c> forward ;  
        | procedure <phead_c> <block> ;  
        | function <phead_c> forward ;  
        | function <phead_c> <block> ;  
  
<phead_c> → <phead> ;  
<phead> → <idname> <params> : <type_id>  
<phead_c> → <phead> ;  
<phead> → <idname> <params>  
        | ε  
<params> → ( <param_list> )  
        | ε  
<param> → var <par_decl>  
        | <par_decl>  
        | ε  
<par_decl> → <id_list> : <type_id>  
<param_list> → <param_list> ; <param>  
        | <param>  
<id_list> → <id_list> , <id>  
        | <id>  
...
```